

lumeplus





MAGNETIC TRACK LIGHT

An innovative lighting system used for various applications highlighting architectural features in a space, creating infinities shapes and designs. The track light can be used in walls and ceilings surface, suspended or recessed assembled in different ways. The customizable design is an attractive unique attraction to your interiors you may install fixtures, linear, pendants, spots or combinations on a rail system to create a super fantastic functional light for all your designs. The light source used for these tracks are by LUMILEDS 3030 2D chips, and can be controlled and dimmed by DALI PLC system which controls each fixture without any additional wiring by a smart and easy "plug and play" design.

MAGNETIC TRACK LIGHT

LP-TL-1000

DIMENSION	300x180x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	15-25
LUMENS (Lm)	1950-3250
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1009

DIMENSION	150x180x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	7-14
LUMENS (Lm)	910-1820
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1010

DIMENSION	100x180x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	05-10
LUMENS (Lm)	650-1300
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20



MAGNETIC TRACK LIGHT

LP-TL-1050

DIMENSION	300x280x90mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	6x3
LUMENS (Lm)	1440
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20



MAGNETIC TRACK LIGHT




LP-TL-1004a

DIMENSION	300x30x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	7-14
LUMENS (Lm)	910-1820
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1005a

DIMENSION	300x90x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	15-25
LUMENS (Lm)	1950-3250
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

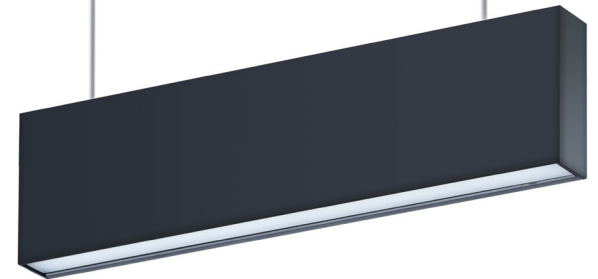

MAGNETIC TRACK LIGHT

LP-TL-1004



DIMENSION	300x30x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	7-14
LUMENS (Lm)	910-1820
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1005

DIMENSION	300x90x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	15-25
LUMENS (Lm)	1950-3250
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-2000

DIMENSION	1000/2000/3000/4000x25x35mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	22W/M
LUMENS (Lm)	2500Lum/m
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

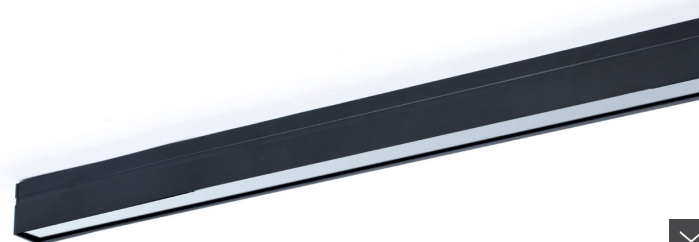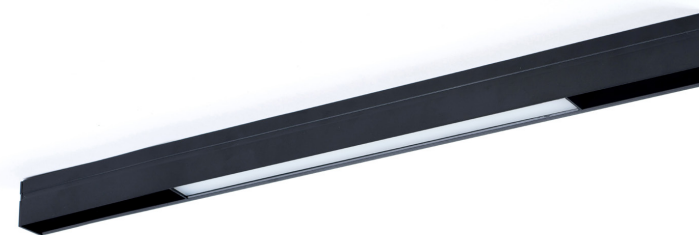

MAGNETIC TRACK LIGHT

LP-TL-1009s

DIMENSION	150x180x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	7-14
LUMENS (Lm)	910-1820
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1000s


DIMENSION	300x180x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	15-25
LUMENS (Lm)	1950-3250
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1004s

DIMENSION	300x30x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	7-14
LUMENS (Lm)	910-1820
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

LP-TL-1005s

DIMENSION	300x90x20mm
CCR	2700K-3000K-4000K-6000K
CRI	>90
POWER (W)	15-25
LUMENS (Lm)	1950-3250
LED (Brand)	LUMILEDS
COLOR	black-white
IP	20

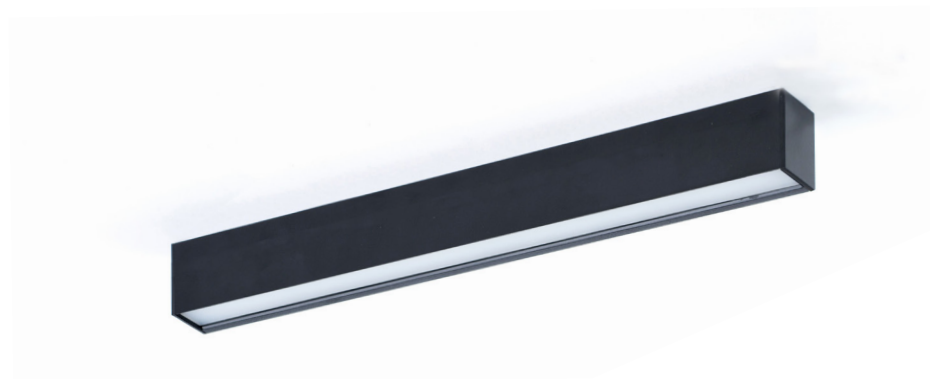

MAGNETIC TRACK LIGHT

LP-TL-1200

DIMENSION 1000/2000/3000/4000
COLOR natural anodize

LP-TL-1001

DIMENSION 1000/2000/3000/4000x25x35mm
COLOR black-white
IP 20

LP-TL-1001P

DIMENSION 50x23mm
COLOR black-white
IP 20


LP-TL-1001L

DIMENSION 100x100x35mm
COLOR black-white
IP 20

LP-TL-1001T

DIMENSION 175x100x35mm
COLOR black-white
IP 20

FORMA an unique accessory used for recessed tracks in false ceiling to get a perfect Trimless finish providing super aesthetic that blends with its surroundings. Unlike other track lights, LUMEPLUS developed a new technology that turn the track light conductive area to be invisible or in any different color (without the cooper or gold line). Stand Alone models are also available in order to have a complete range of options and solutions where the track light is unnecessary.

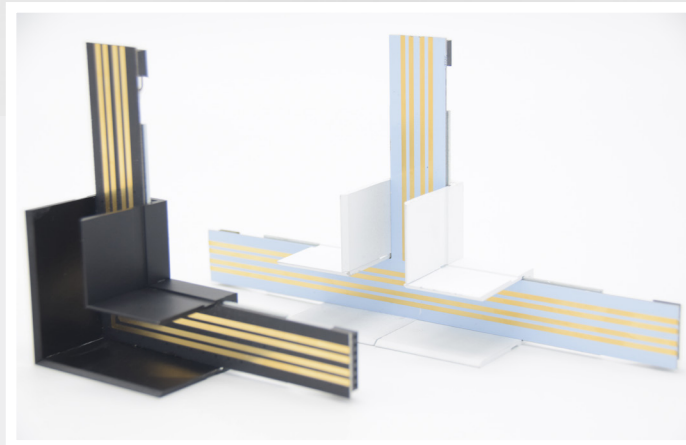

lumeplus

RECESSED



RECESSED



Believe it? CAN YOU

**1200mm Diameter Trimless
Downlight is adjustable**

SKYLITE RECESSED is a Big size round adjustable down light, available in several diameters and designed to achieve high visual impact. This high performance recessed luminaries combines the LED technology and a smart mechanical system. The SKYLITE RECESSED is designed for Plasterboard ceiling-mounting, integrates with architecture, upgrading the uniqueness of the room.

SKYLITE RECESSED

LP-SKY-051-40

DIMENSION	h: 130mm , 470mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	48
LUMENS (Lm)	4560
LED (Brand)	UNI
COLOR	white+Black
IP	20

LP-SKY-051-60

DIMENSION	h: 130mm , 670mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	72
LUMENS (Lm)	6840
LED (Brand)	UNI
COLOR	white+Black
IP	20

LP-SKY-051-78

DIMENSION	h: 130mm , 850mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	110
LUMENS (Lm)	10450
LED (Brand)	UNI
COLOR	white+Black
IP	20



lume**plus**

SURFACE MOUNTED





lumeplus

ROUND Series lamps are a ceiling light collection that provides a homogeneous ambient lighting recreating an natural daylight and can be installed on surface or suspended. LUMEPLUS Round ceiling lights in several sizes with the aim of making it suitable for integration with any size space or room and if required different elements can be combined together. LUMEPLUS manufactures these ceiling lights in two colors matt lacquered black and matt lacquered white. Specials finishes and different lighting control drivers can be ordered by request.

SURFACE MOUNTED

ROUND

LP-SKY-02723

DIMENSION	h:80mm , 230mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	25
LUMENS (Lm)	2375
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-SKY-02778


DIMENSION	h:80mm , 780mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	110
LUMENS (Lm)	10450
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-SKY-02740

DIMENSION	h:80mm , 400mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	48
LUMENS (Lm)	4560
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-SKY-02760

DIMENSION	h:80mm , 600mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	72
LUMENS (Lm)	6840
LED (Brand)	UNI
COLOR	black-white
IP	20

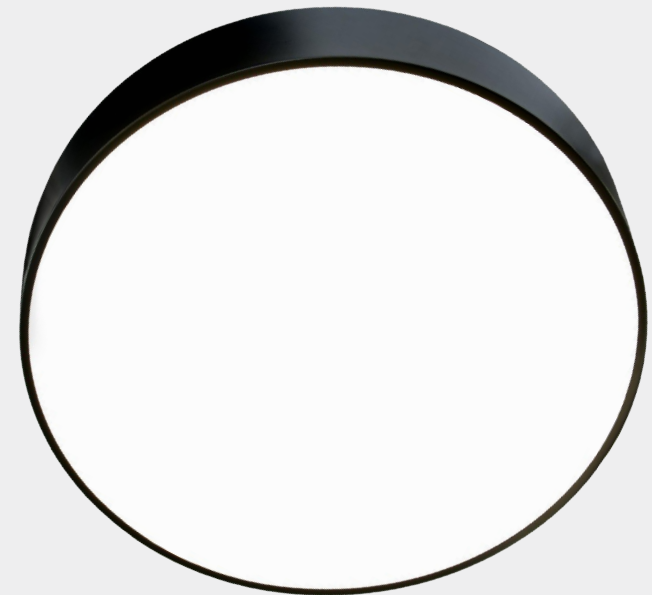

ROUND SLIM

LP-SKY-0c58-40


DIMENSION	h:50mm , 400mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	25
LUMENS (Lm)	2375
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-SKY-058-60

DIMENSION	h:50mm , 600mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	48
LUMENS (Lm)	4560
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-SKY-058-78

DIMENSION	h:50mm , 780mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	72
LUMENS (Lm)	6840
LED (Brand)	UNI
COLOR	black-white
IP	20

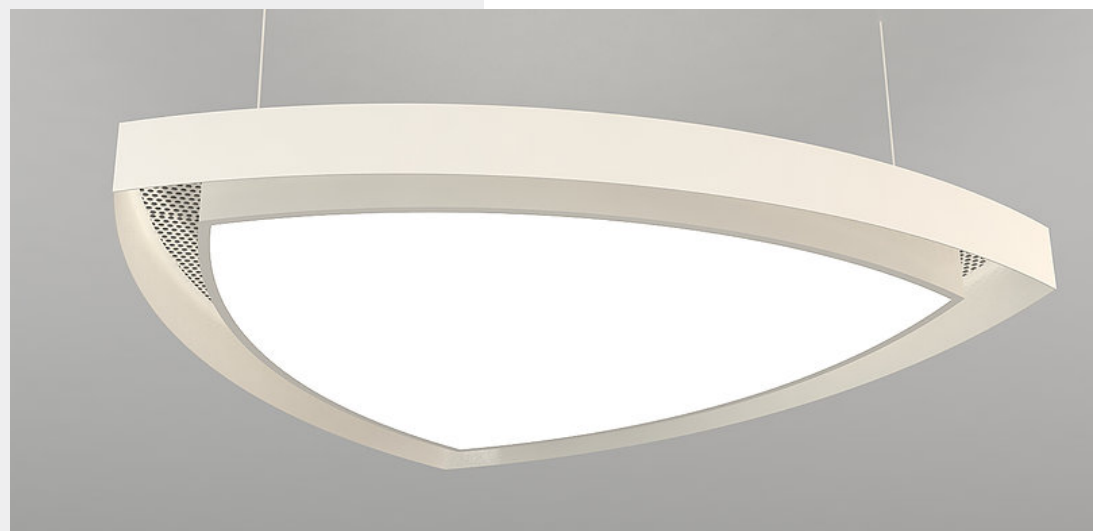

SURFACE MOUNTED



DEEP DESIGN series for indoor use, made of high grade metal body providing great versatility and can combine two colors by request enabling designer to connect the luminaire with others elements and get elegant integration different size space or room. This refined and unique collection is manufactured in two options, for surface and suspended installations.

DEEP

LP-SKY-037-40


DIMENSION	h:140mm , 400mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	40
LUMENS (Lm)	3600
LED (Brand)	UNI
COLOR	customized
IP	20

LP-SKY-037-60

DIMENSION	h:140mm , 600mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	60
LUMENS (Lm)	5400
LED (Brand)	UNI
COLOR	customized
IP	20

LP-SKY-037-78

DIMENSION	h:140mm , 780mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	100
LUMENS (Lm)	8400
LED (Brand)	UNI
COLOR	customized
IP	20

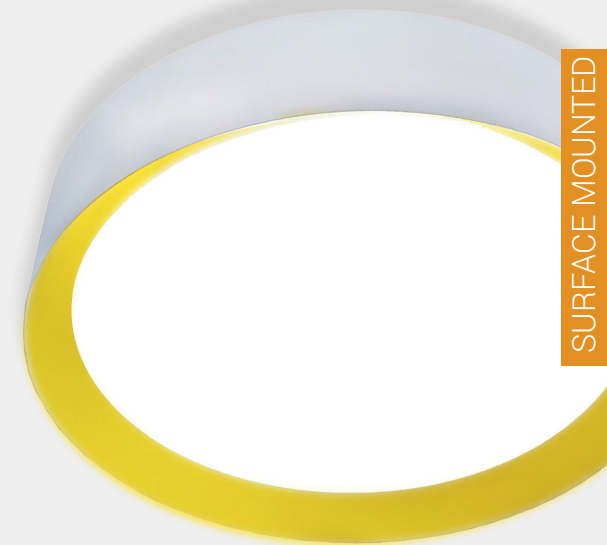

SURFACE MOUNTED



ROUND SUSPEND easily integrated within any ceiling thanks to its slim silhouette and elegant finish, available in matt white or matt black. This ceiling light is perfect for lighting wide areas or to light up an specific space or element. To be surface mounted or suspended.

ROUND

LP-RD-0015

DIMENSION	h:40mm, 800mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	100
LUMENS (Lm)	11000
LED (Brand)	UNI
COLOR	black
IP	20



SURFACE MOUNTED

lumeplus

SURFACE MOUNTED

BULKHEAD is a range of compact led surface mounted down lights for indoor use, offers great versatility, can be used for ambient light and accent light. Made of pure aluminum, with a built in high quality internal driver, a specially designed reflector and anti-glare glass diffuser. This collection offers an adaptable creation that provides diffused or direct/indirect light and can be mounted vertically or horizontally.

SURFACE MOUNTED

BULKHEAD

LP-BK-0062

DIMENSION	75mmØ h:90mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	7
LUMENS (Lm)	560
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0064

DIMENSION	90mmØ h:120mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	12
LUMENS (Lm)	960
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20



BULKHEAD

LP-BK-0074

DIMENSION	76mmØ h:100mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	7
LUMENS (Lm)	560
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0077

DIMENSION	113mmØ h:110mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	12
LUMENS (Lm)	960
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20



lumeplus



SURFACE MOUNTED

BULKHEAD

LP-BK-0066

DIMENSION	65mmØ h:65mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	3
LUMENS (Lm)	240
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0068

DIMENSION	75mmØ h:65mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	7
LUMENS (Lm)	560
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0070

DIMENSION	113mmØ h:70mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	12
LUMENS (Lm)	960
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0072

DIMENSION	157mmØ h:80mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	18
LUMENS (Lm)	1440
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	20

LP-BK-0078

DIMENSION	190mmØ h:90mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	25
LUMENS (Lm)	2000
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	N/A



ADJUTABLE

LP-ADJ-0079

DIMENSION	75mmØ h:115mm
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	6
LUMENS (Lm)	560
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54

EYE

LP-ADJ-00114

DIMENSION	h:50mm,65mmØ
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	3
LUMENS (Lm)	240
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54

LP-ADJ-00116

DIMENSION	h:50mm,76mmØ
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	7
LUMENS (Lm)	560
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54



SURFACE MOUNTED

LP-ecsm-0118

DIMENSION	h:50mm,120mmØ
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	12
LUMENS (Lm)	960
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54

LP-ecsm-0120

DIMENSION	h:50mm,158mmØ
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	18
LUMENS (Lm)	1440
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54

LP-ecsm-0099

DIMENSION	h:50mm,220mmØ
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (w)	25
LUMENS (Lm)	2000
LED (Brand)	BRIDGELUX
COLOR	black-white
IP	54



RING Series are a ceiling light collection that provides a homogeneous ambient lighting recreating an natural daylight and can be installed on surface or suspended. LUMEPLUS Ring ceiling lights in several sizes with the aim of making it suitable for integration with any size space or room and if required different elements can be combined together. LUMEPLUS manufactures these ceiling lights in two colors: matt lacquered black and matt lacquered white. specials finishes and different lighting control drivers can be ordered by request.

RING

LP-RG-027s23

DIMENSION	h:80mm , 230mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	25
LUMENS (Lm)	2375
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-RG-027s78

DIMENSION	h:80mm , 780mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	110
LUMENS (Lm)	10450
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-RG-027s40

DIMENSION	h:80mm , 400mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	48
LUMENS (Lm)	4560
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-RG-027s60

DIMENSION	h:80mm , 600mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	72
LUMENS (Lm)	6840
LED (Brand)	UNI
COLOR	black-white
IP	20



RING SLIM

LP-RGSM-058s40

DIMENSION	h:50mm , 400mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	25
LUMENS (Lm)	2375
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-RGSM-058s60

DIMENSION	h:50mm , 600mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	48
LUMENS (Lm)	4560
LED (Brand)	UNI
COLOR	black-white
IP	20

LP-RGSM-058s78

DIMENSION	h:50mm , 780mm Ø
CCR	2700K-3000K-4000K-6000K
CRI	>80
POWER (W)	72
LUMENS (Lm)	6840
LED (Brand)	UNI
COLOR	black-white
IP	20

