
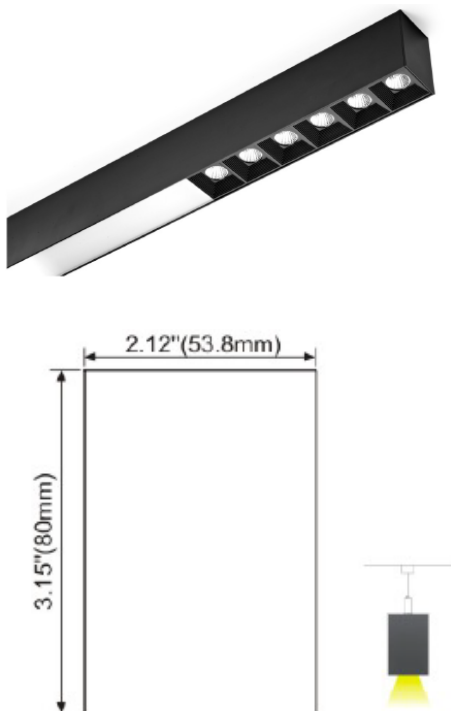
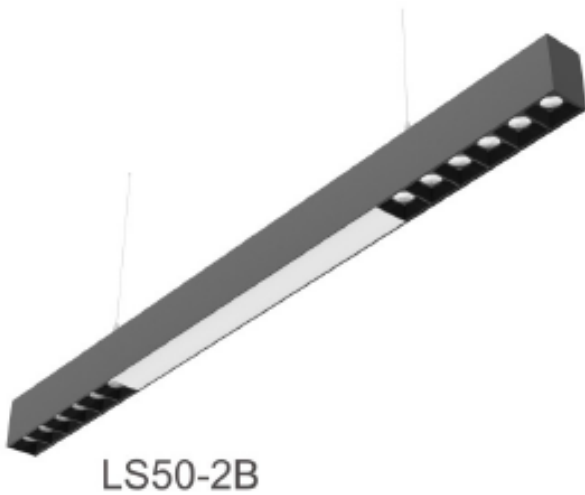


**Combi Series Linear Pendant LED
LPLS50-2A/2B**

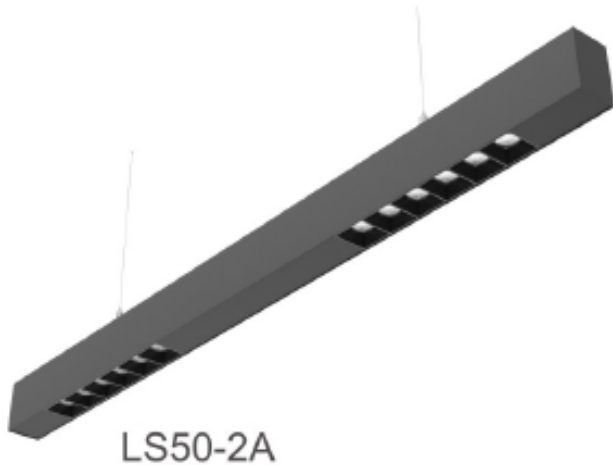

Technical data

Configurator of Louver Linear LED Pendant

The Combi Connect with Reflective louvre is efficient office lighting reinterpreted for the LED age. The Double-chambered reflector sections offer premium anti-glare by means of matte diffuser cushions. This means that glare values required for office lighting are adhered to, even at very high light powers. At the same time, extra-wide homogeneous light distribution meets the standard requirements for lighting of workstations and surrounding areas. The housing surface made from extruded silver anodized aluminum is extra superior, while the highly reflective material of the bi-parabolic louver constitutes a genuine design highlight.

Lighting Area 3-4Sqmt

LED power 35W Per Meter Light source CREE XPE LED

Input voltage 240 volt mains supply

Lumens 925lm x3

Color Temperature 3000K/4000K

Optics 15°35°45°Beam Angle

Material Aluminum Extrusion finish Black

Dimensions L2000mm * W53.8 * H300

Lifespan ≥30000h

Working temperature -30°~45°C

Protection Grade IP20, Protection Class I , CE

Make: LUMEPLUS LPLS50-2A/2B

