
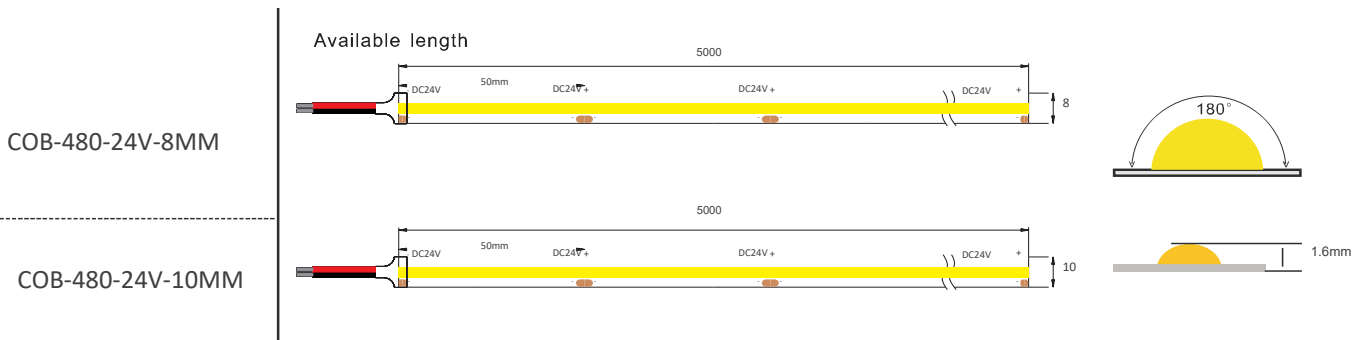


FLEXI COB SPOTLESS LIGHT ON GLOSSY SURFACE 3000K-5000K
No Spot reflection on Glossy /Mirror Surfaces



ELECTRICAL CHARACTERISTICS

Power	12W
Supply Voltage	24V DC
Supply Current	0.6753 A
Operating Temp	-40~+50°C
Control	0-10 V/DMX/DALI
Qty/Length of tested products	1 x 1000 mm
Connection	Male/female connectors

LIGHTOUTPUT

efficacy (lm/W)	100.00 lm/W
Luminous flux	1200 lm/m
Beam angle	180°

COLOUR/TEMPERATURE CHARACTERISTICS

Correlated Colour Temp (CCT)	3000K-5000K
Colour Rendering Index (CRI, Ra)	80.8
Chromaticity coordinates (CIE 1931 - x,y)	0.3828, 0.3799

PHYSICAL CHARACTERISTICS

Section Dimensions	W = 8 mm / H = 1.5 mm
LED Pitch	23.80 mm
Mounting	Clip
IP Rating	IP 20 - 68
Profile Colour	Anodized Aluminum

