
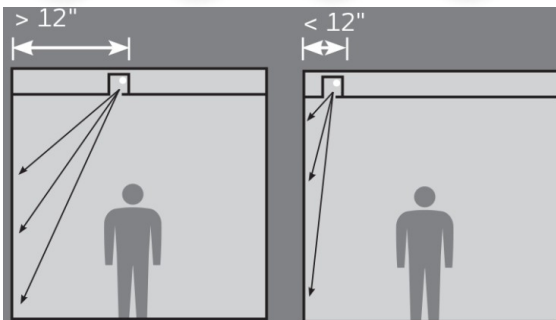


**FLEXI GRAZER WITH OPTICS FOR MINIMUM SPACE WALL WASH
DESIGNED FOR 3MTS WALL WASH WITHOUT LIGHT POLLUTION OR SPILL**

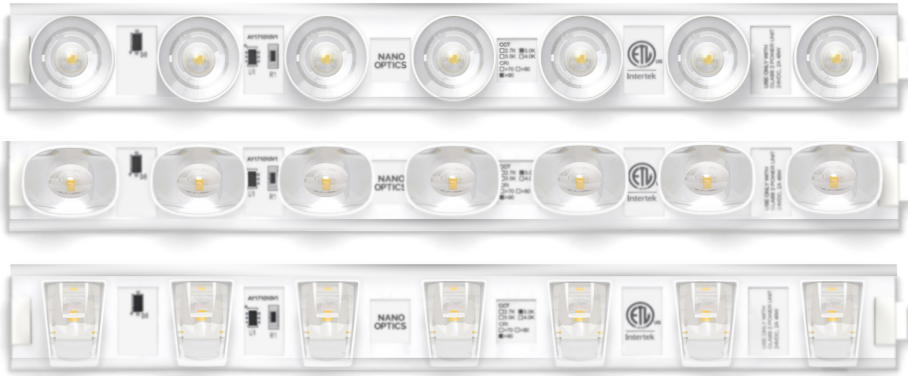

Wallwash

Wall Graze

Lamp spacing between fixtures should be equal to the distance the fixtures are placed away from the wall.



ELECTRICAL CHARACTERISTICS

Power Consumption	18.61W
Supply Voltage	24V DC
Supply Current	0.7753 A
Operating Temp	-40~+50°C
Control	0-10 V/DMX/DALI
Qty/Length of tested products	1 x 1000 mm
Connection	Male/female connectors

LIGHT OUTPUT

Luminaire efficacy (lm/W)	115.44 lm/W
Luminous flux	2148 lm/m
Beam angle	20°

COLOUR/TEMPERATURE CHARACTERISTICS

Correlated Colour Temp (CCT)	3959K
Colour Rendering Index (CRI, Ra)	83.8
Chromaticity coordinates (CIE 1931 - x,y)	0.3828, 0.3799

PHYSICAL CHARACTERISTICS

Section Dimensions	W = 30 mm / H = 37 mm
LED Pitch	23.80 mm
Mounting	Swivel Clip
IP Rating	IP 67
Profile Colour	White / Black

