
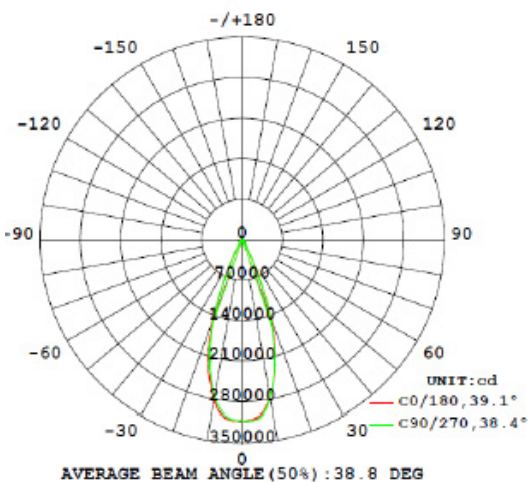


**Surface/Pendant light
LP-WQ-G046**

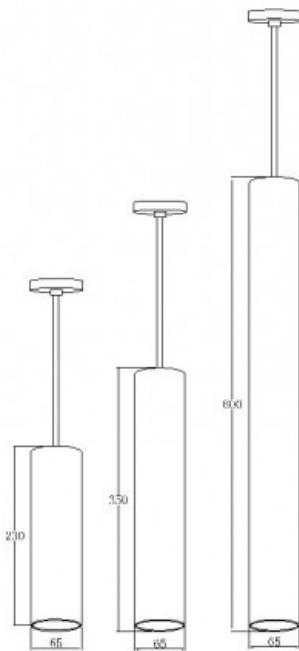

Technical data

Optical Cylindrical LED Surface / Pendant

Optical LED light adopts simple design with stylish appearance, easy to install, paying more attention to leisure and comfort. It gives space a clear and lively feeling. Different color of surface ring creates diversified light atmosphere according to environment.

- Lighting Area 1-2square meters
- LED power: 12W
- Optics 15°/24°/38° beam angle
- LED source Cree COB 75lm per watt
- Color temperature 3000K/4000K/5000K
- Input voltage AC85-265V
- Material Matt Black / Matt White
- Lifespan ≥40000h
- Working temperature -30°~50°C
- Protection Grade IP20 Class II CE
- Dimension: **D65*H230/350/600MM**

Integral Driver body made of fire resistance ABS Material composed of Constant current power supply and intelligent integrated circuits PF>0.9

Make: Lumeplus LP-WQ-G046

