


Magnetic track lighting system

NEW 2021

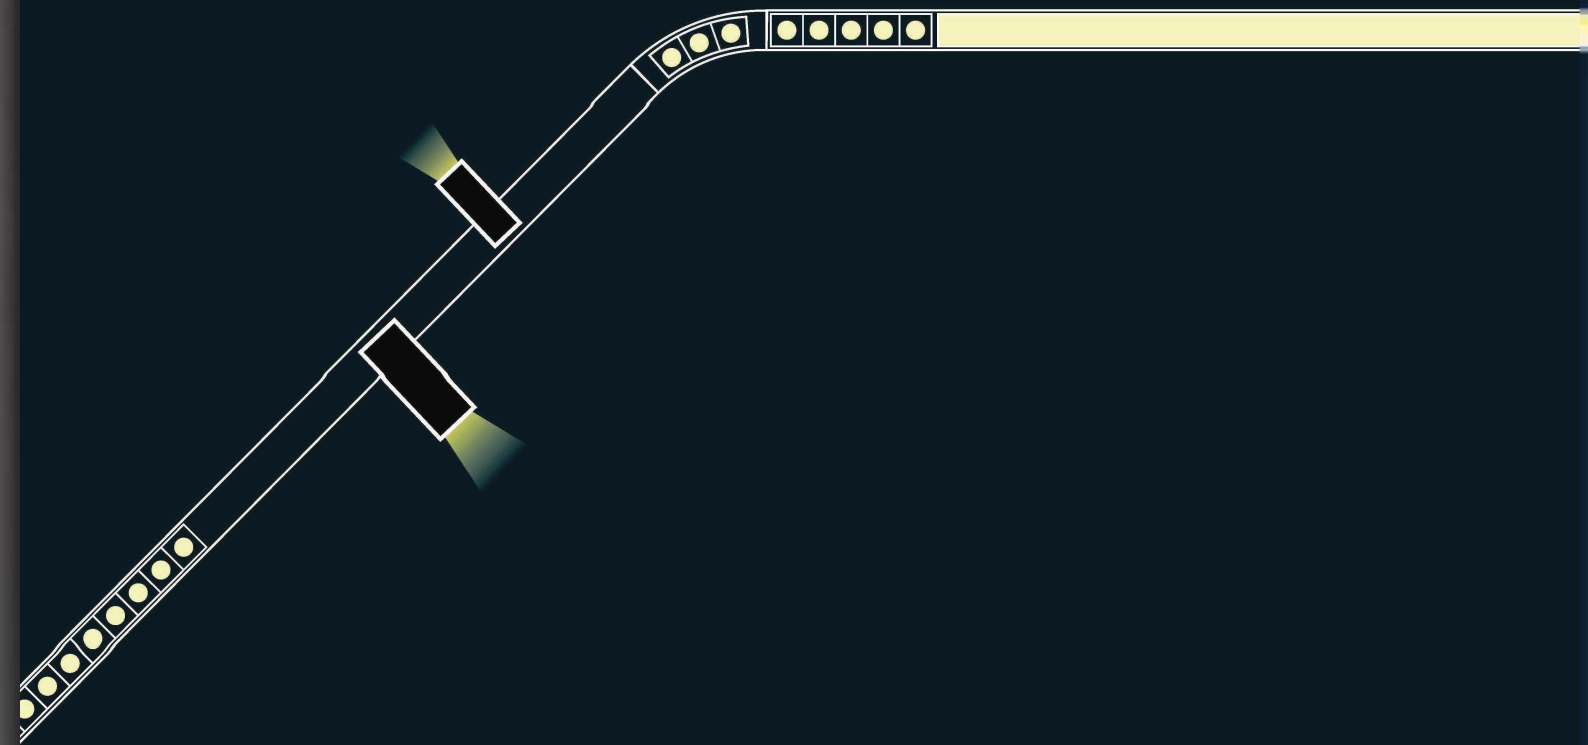

MAGNETIC -Track Lighting System

Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

NdFeB N35 rare-earth permanent magnet, 3600 (+-10%) Gauss





Scratch powder coating

Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

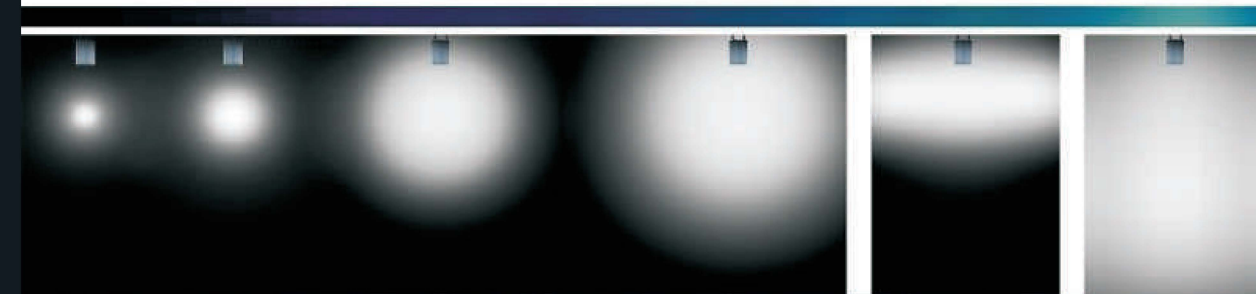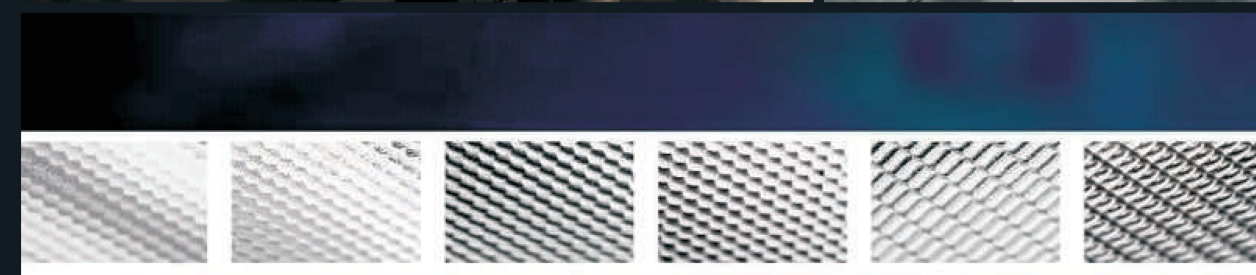

LIGHTING CAN
ILLUMINATE ART
WHILE BEING A WORK
OF ART ITSELF







CLICK —MAGNETIC TRACK LIGHT

The CLICK 24V magnetic track light system consists of compact profiles in which LED light modules are placed. The CLICK magnetic LED modules are magnetically connected to the profiles, making it easy to position and move them while the power is on. Installation of the LED modules is therefore no more than a simple “click”.




NdFeB N35 rare-earth permanent magnet, 3600 (+-10%) Gauss.




NEW! CLICK STANDARD & SLIM SERIES

The 39mm tracks offers light modules with high power for application areas that demand high light output. Ideal for retail, office and high ceiling areas. The new 27mm Slim collection brings instant elegance to any area. Offering seamless designs that look great in residential spaces.



39 x 79 mm



27 x 58 mm

FLEXIBILITY OR LIGHTING DESIGNERS WITH PASSION

The CLICK magnet track light system consists of recessed and surface-mounted profiles for ceiling and wall. The surface-mounted profiles can also be suspended using the suspension kit. The profiles are available in lengths of 1 and 2 meters, but can be shortened to create the exact desired length. The profiles are available in sandy black and sandy white.



27.5 mm

39 mm

27.5 mm

39 mm


27.5 mm


39 mm

Various Installations:

surface/recessed/pendant

Black White Golden Black bronze

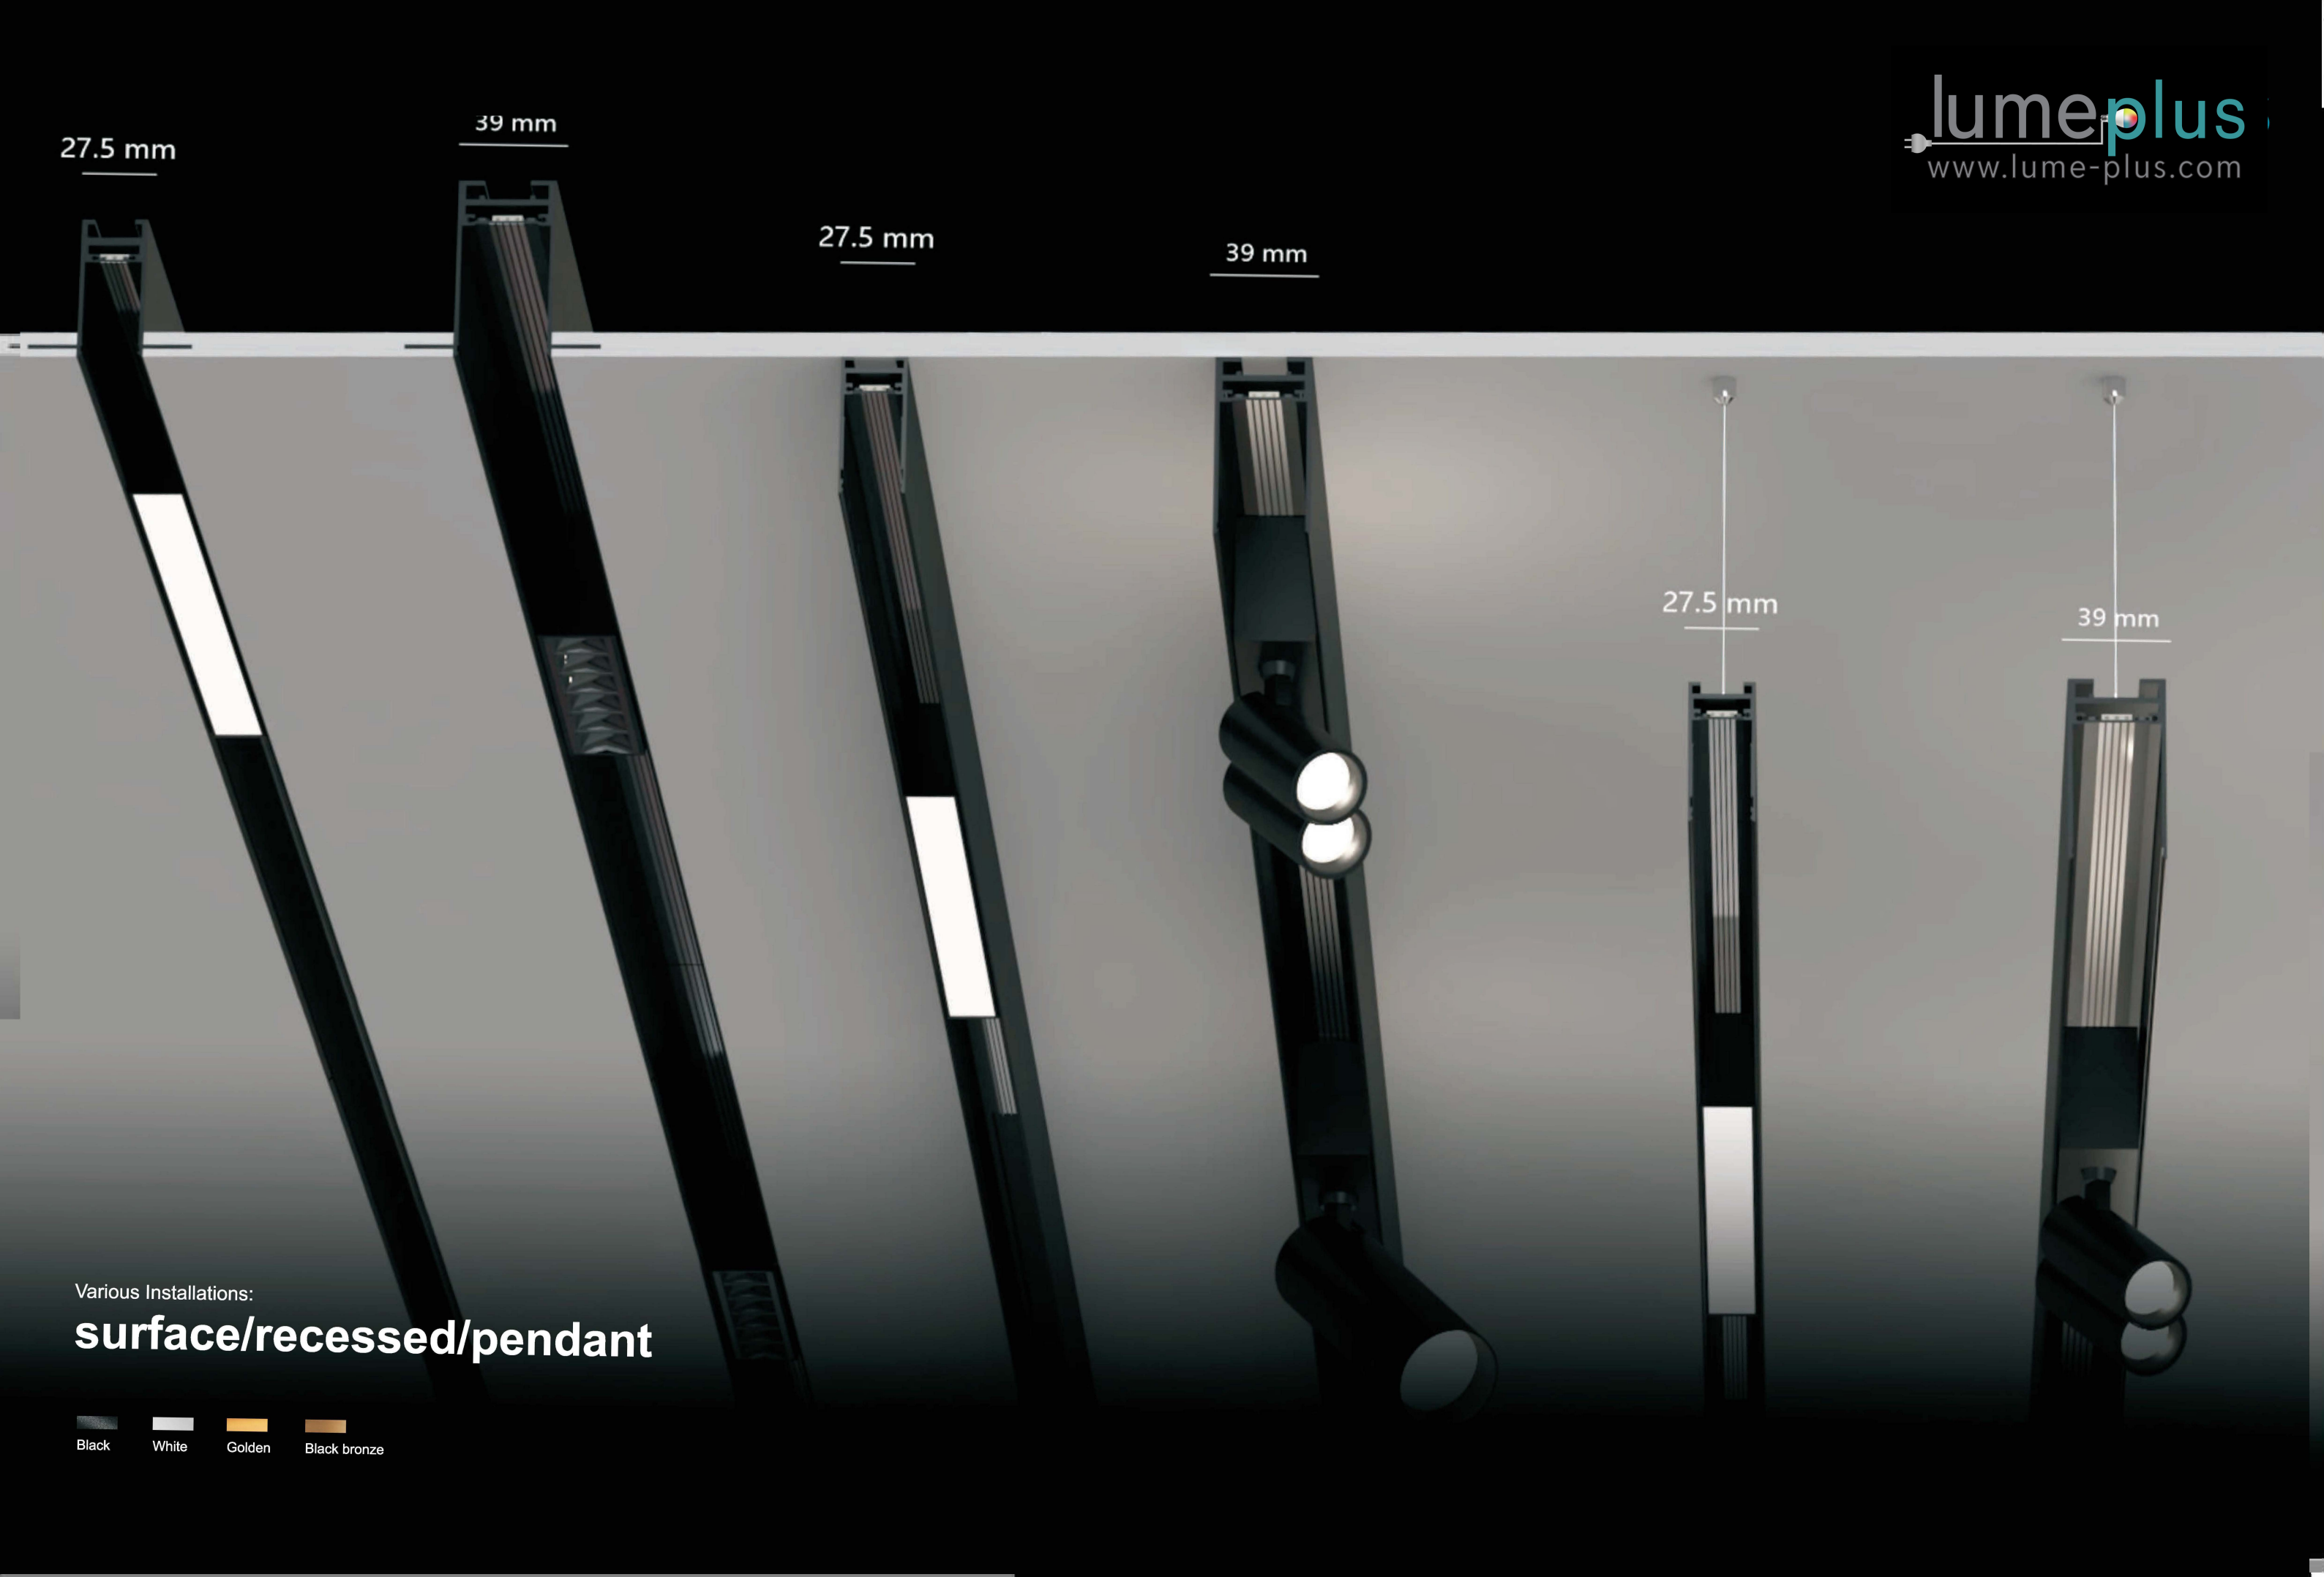


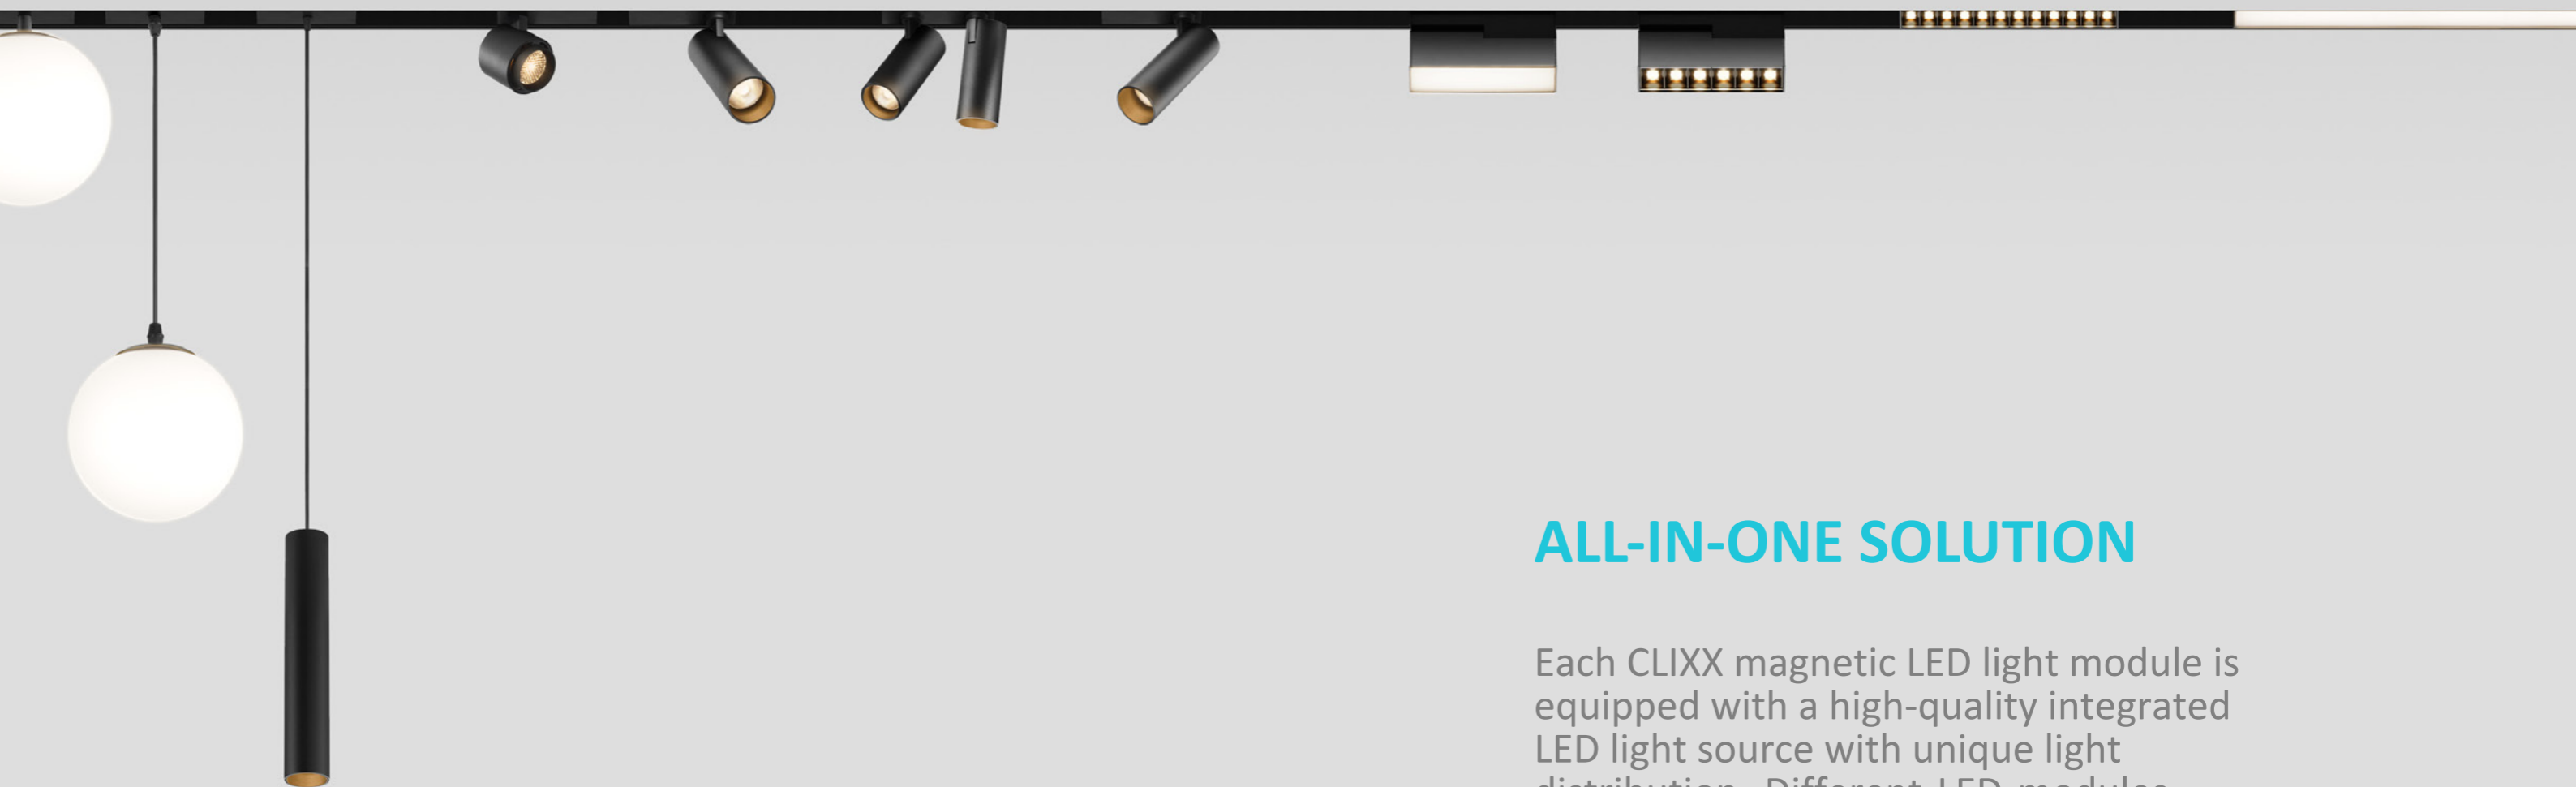

ALL-IN-ONE SOLUTION

Each CLIXX magnetic LED light module is equipped with a high-quality integrated LED light source with unique light distribution. Different LED modules provide the perfect light for every specific application. Linear modules with high luminance and diffuse light for general lighting and spot modules with focused bright light for accent lighting make the CLIXX system an all-in-one solution.

STANDARD SERIES



● Recessed




- Surface
- Pendant
- Recessed



- ### TrackS-A
- Surface
 - Pendant
 - Recessed

US standard

CLICK I Track series


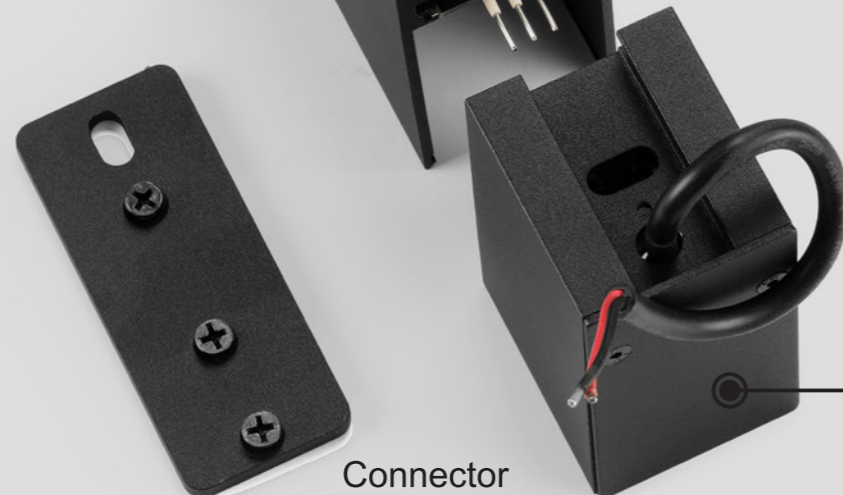


CLICK STANDARD | Track series MAGNETIC TRACK LPSTD100/200 | Track series



Model	Power	Installation	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm

■ Sandy Black □ Sandy White

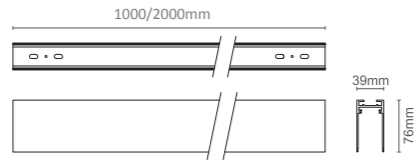

CORNER


CONNECTIONS

■ Sandy Black □ Sandy White
White corner



Inner corner

■ Sandy Black □ Sandy White




Outer corner

■ Sandy Black □ Sandy White



T corner

■ Sandy Black □ Sandy White




45° corner

■ Sandy Black □ Sandy White



Cross corner


■ Sandy Black □ Sandy White




POWER FEED

Input terminal

■ Sandy Black □ Sandy White

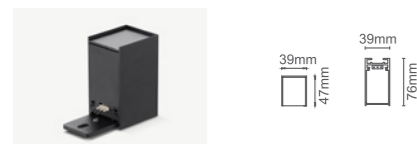


CLICK STANDARD MERGE IN | Track series LPSTDMI100/200 | Track series

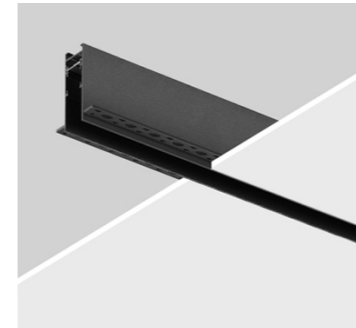

Model	Power	Installation	Length
1 Meter profile	200W max	Trimless recessed	1000mm
2 Meter profile	200W max	Trimless recessed	2000mm


■ Sandy Black □ Sandy White



CORNER


CONNECTIONS

■ Sandy Black □ Sandy White
White corner recessed

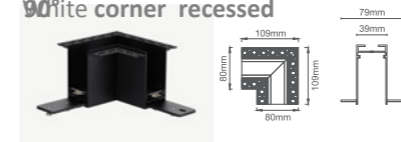


Inner corner recessed

■ Sandy Black □ Sandy White

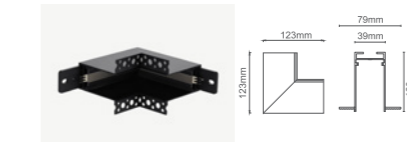

Outer corner recessed

■ Sandy Black □ Sandy White



T corner recessed

■ Sandy Black □ Sandy White



POWER FEED

Input terminal

■ Sandy Black □ Sandy White




CLICK ACCESSORIES STANDARD | Track series

Recessed kit



Pendant kit-A

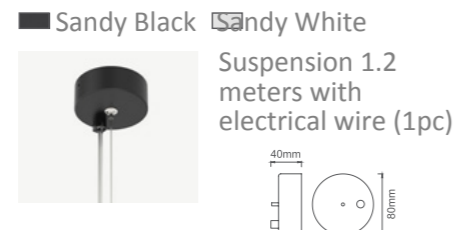


Pendant kit-B




Track connector




Power plate 65mm

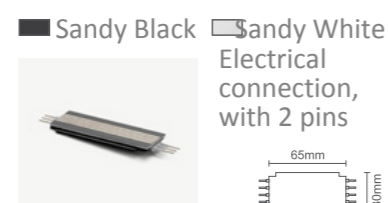

Surface mounting kit

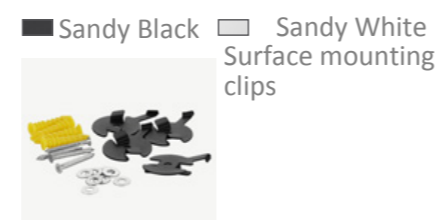

Track cover

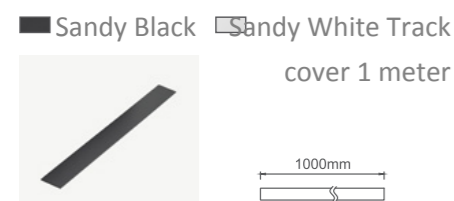


Track driver box




Driver box




End cap

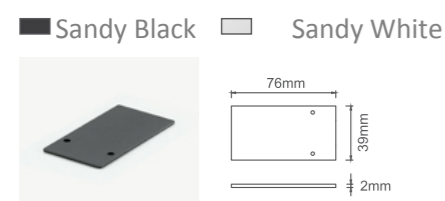


Pin2

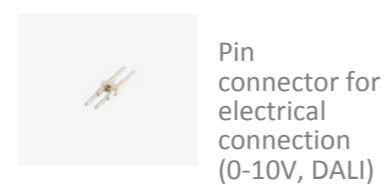

Pin3

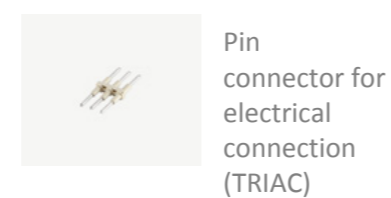


200W Driver

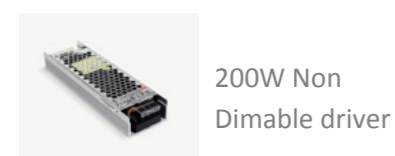



75W TRIAC Driver



150W 1-10V Driver

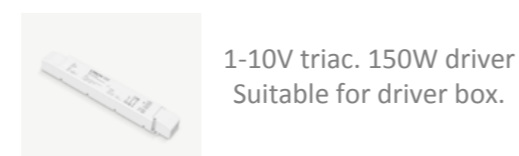

CLICK SPOT FLUSH STANDARD | Spot series



SOLO SPOT LPSFLSD03




Power	CRI	SDCM	CCT	Beam Light output	
2W	> 80	<3	2700K	12°	120Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

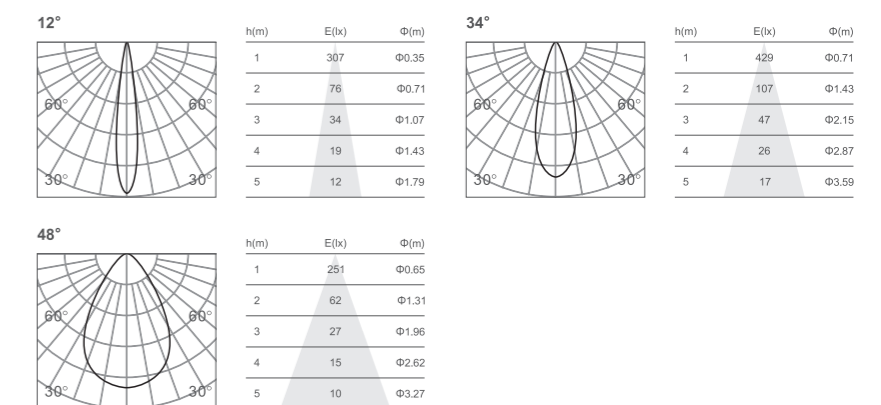

TRI-SPOT LPSFLSD08




Power	CRI	SDCM	CCT	Beam Light output	
4W	> 80	<3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

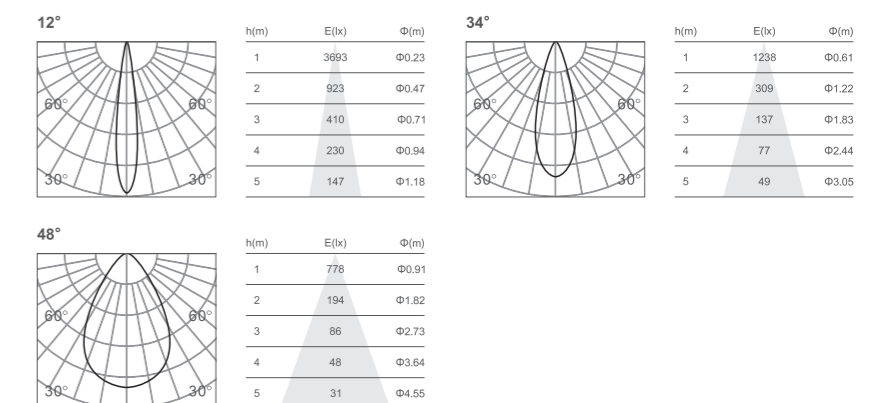

CLICK SPOT FLUSH STANDARD | Spot series



SIX-SPOT LPSFLSD16




Power	CRI	SDCM	CCT	Beam	Light output
8W	80	<3	2700K	12°	790Lm
	90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29



TWELVE-SPOT LPSFLSD32




Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 80Ra



h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



CLICK LINEAR FLUSH DIFFUSED STANDARD | Flush series



FLUSHMINI LPDFLSD08




Power	CRI	SDCM	CCT	Beam	Light output
4W	> 80	<3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



FLUSHCENTRIC LPDFLSD16




Power	CRI	SDCM	CCT	Beam	Light output
7W	> 80	<3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99



CLICK LINEAR FLUSH DIFFUSED STANDARD | Flush series



LINEAR FLUSH DIFFUSED MODERATE | LPDFLSD32




Power	CRI	SDCM	CCT	Beam	Light output
13W	> 80	<3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

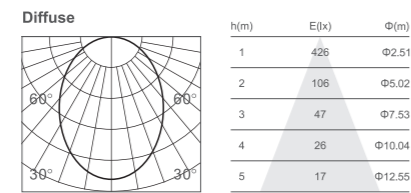

LINEAR FLUSH DIFFUSED MAX | LPDFLSD96





Power	CRI	SDCM	CCT	Beam	Light output
39W	> 80	<3	2700K	Diffuse	2850Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

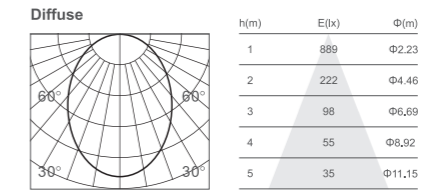

LINEAR FLUSH DIFFUSED WIDE | LPDFLSD64





Power	CRI	SDCM	CCT	Beam	Light output
26W	> 80	<3	2700K	Diffuse	1900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

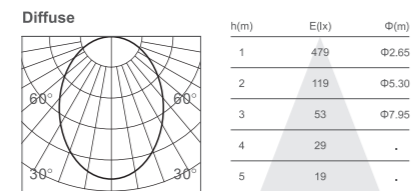

CLICK FOCUS SPOT STANDARD | Focus series



FOCUS SPOT LPFSSD08





Power	CRI	SDCM	CCT	Beam	Light output
4W	> 80	<3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

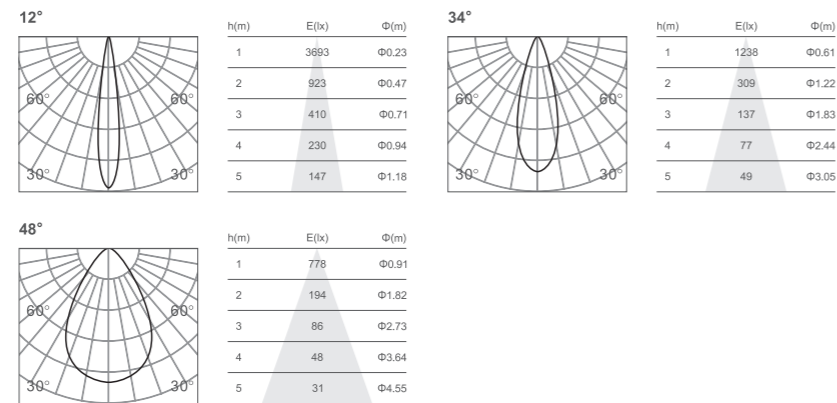

FOCUS SPOT LPFSSD32





Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

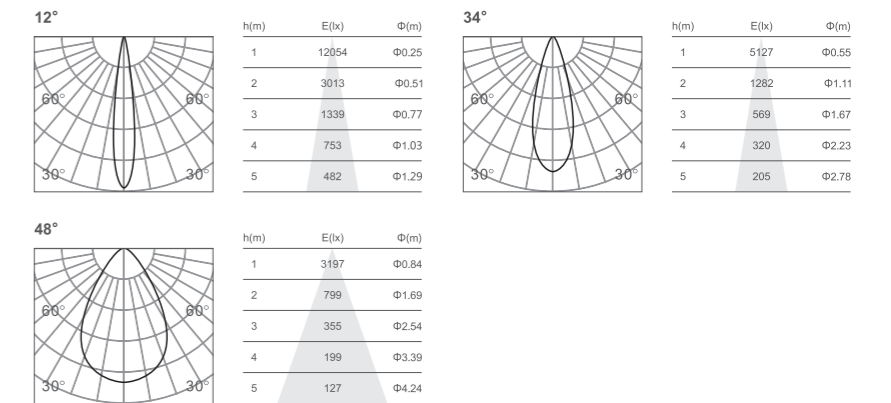

FOCUS SPOT LPFSSD16





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

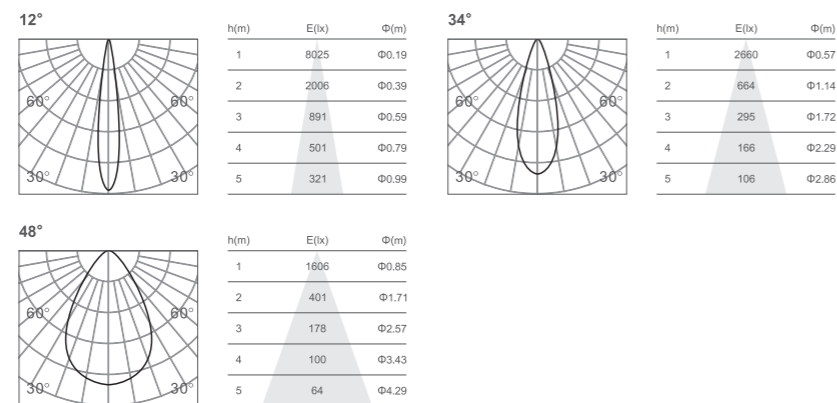

CLICK FOCUS DIFFUSED STANDARD I Focus series



FOCUS DIFFUSED LPFD08





Power	CRI	SDCM	CCT	Beam	Light output
4W	> 80	<3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

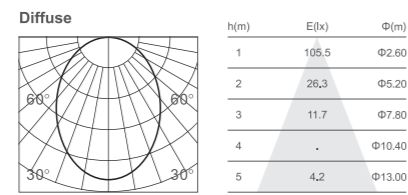

FOCUS DIFFUSED LPFSD32





Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

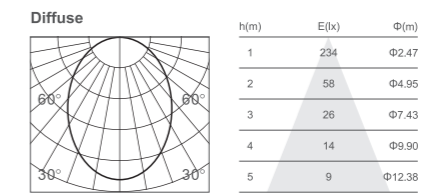

FOCUS DIFFUSED LPFSD18





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

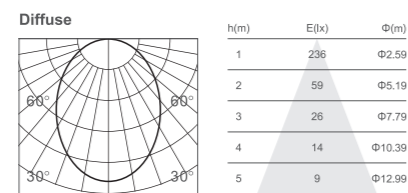

CLICK WALL WASH STANDARD | Wall wash series



FLUSH WASH LINEAR LPFLW13





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	wallwasher	380Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

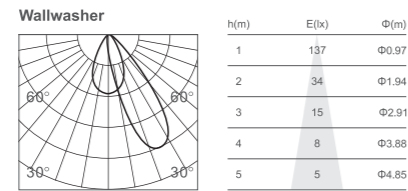

FLUSH WASH LINEAR LPFLW27





Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	wallwasher	880Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

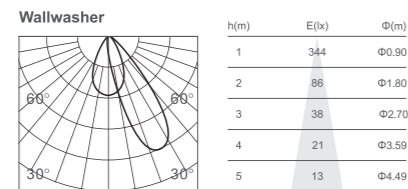

CLIXX POP OUT STANDARD | Out series



POPOUT LPDPO32





Power	CRI	SDCM	CCT	Beam	Light output
13W	> 80	<3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

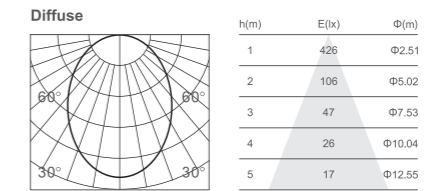

SPOT POPOUT LPSP032





Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

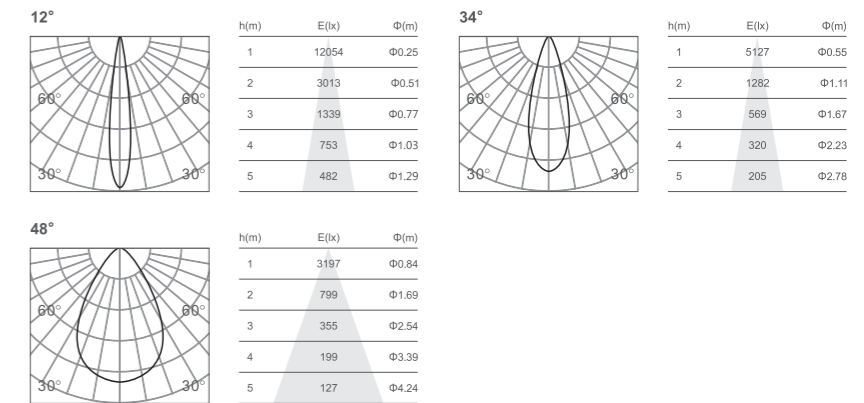



TRACK SPOT LPTS35





Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

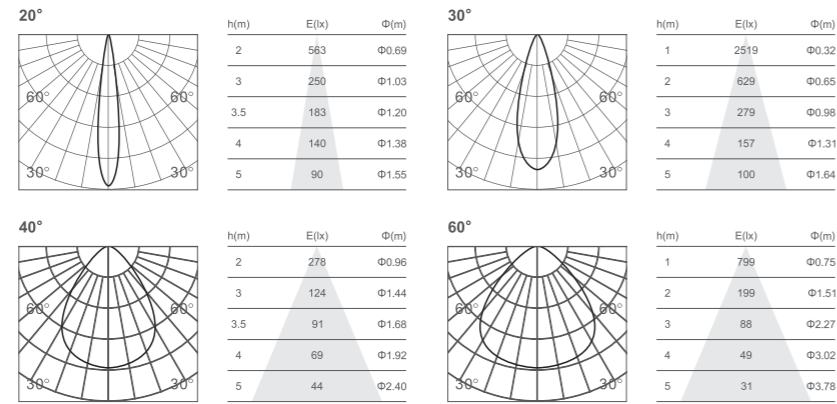

TRACK TWIN SPOT LPTTS35






Power	CRI	SDCM	CCT	Beam	Light output
2x5W	> 80	<3	2700K	20°	880Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

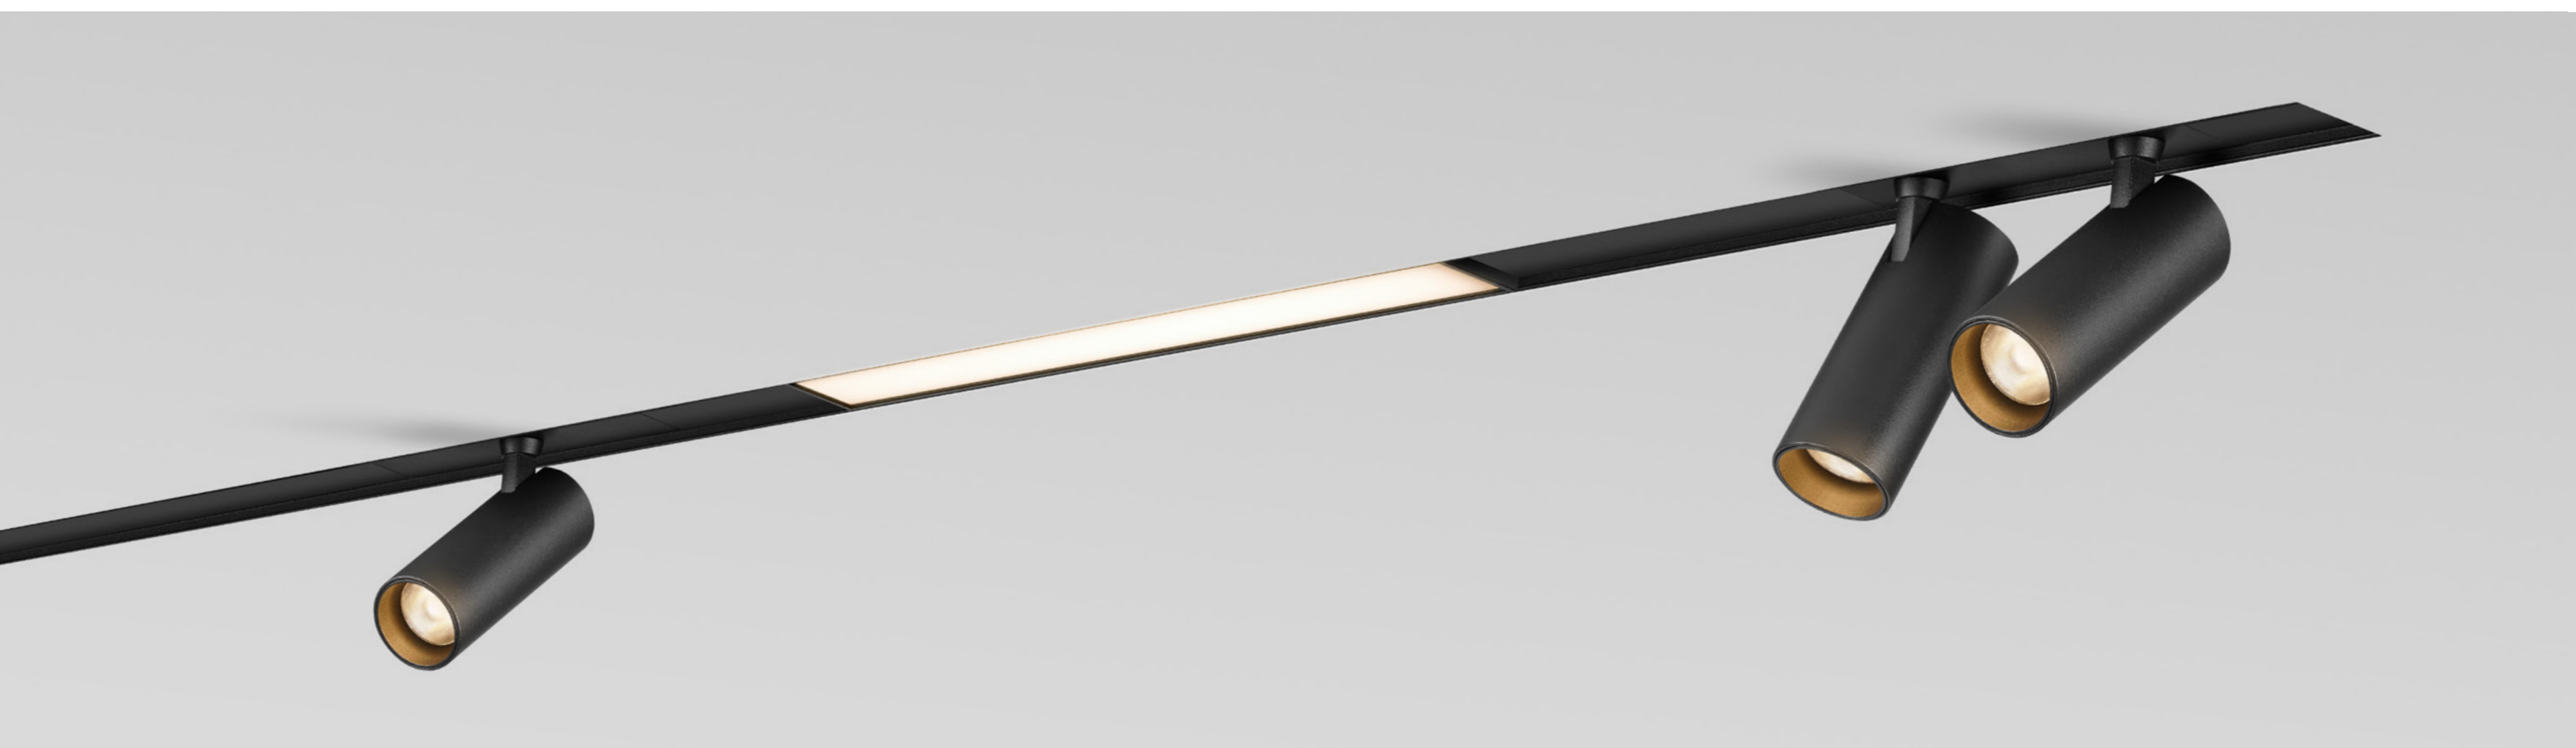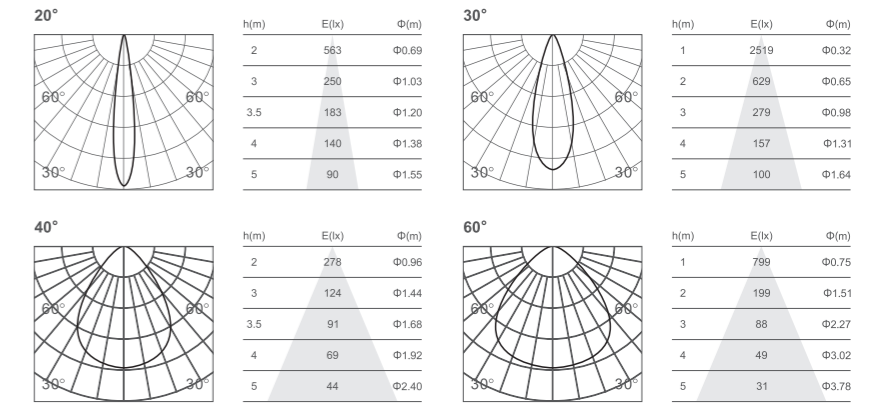



TRACK SPOT LPTS50




Power	CRI	SDCM	CCT	Beam	Light output
10W	> 80	<3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION


3000K 80Ra

18°




h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62

24°



h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03

36°



h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21



TRACK SPOT LPTS50




Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	10°	405Lm
	> 90		3000K	20°	
			4000K	30°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 80Ra

10°




h(m)	E(lx)	Φ(m)
2	4203	Φ0.20
3	1051	Φ0.40
3.5	467	Φ0.61
4	262	Φ0.81
5	168	Φ1.02

20°





h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33

30°



h(m)	E(lx)	Φ(m)
2	699	Φ0.53
3	174	Φ1.06
3.5	77	Φ1.60
4	43	Φ2.13
5	27	Φ2.66



CLICK TRACK STANDARD I Halo Spot series




HALO SPOT LPHS164



Power	CRI	SDCM	CCT	Beam	Light output
18W	> 80	<3	2700K	24°	1750Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



CLICK TRACK STANDARD I Halo Diffused series




HALO DIFFUSED LPHD164



Power	CRI	SDCM	CCT	Beam	Light output
18W	> 80	<3	2700K	Diffuse	950Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White



CLICK TUBE STANDARD I Pendant series



TUBE PENDANT LPTB35





Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

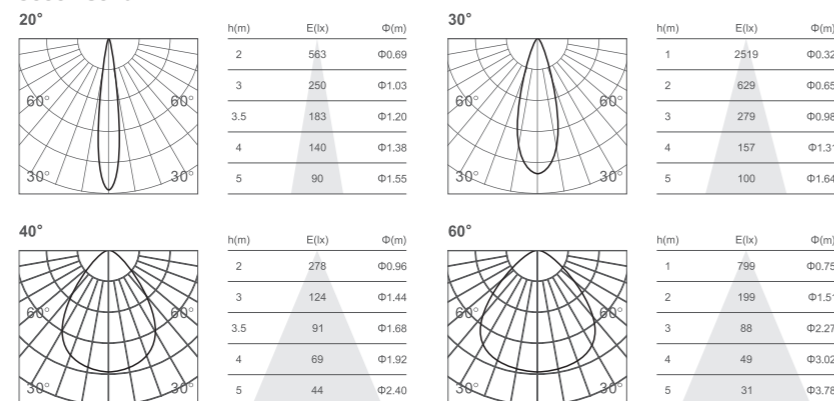

TUBE PENDANT LPTB50





Power	CRI	SDCM	CCT	Beam	Light output
10W	> 80	<3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION



3000K 80Ra

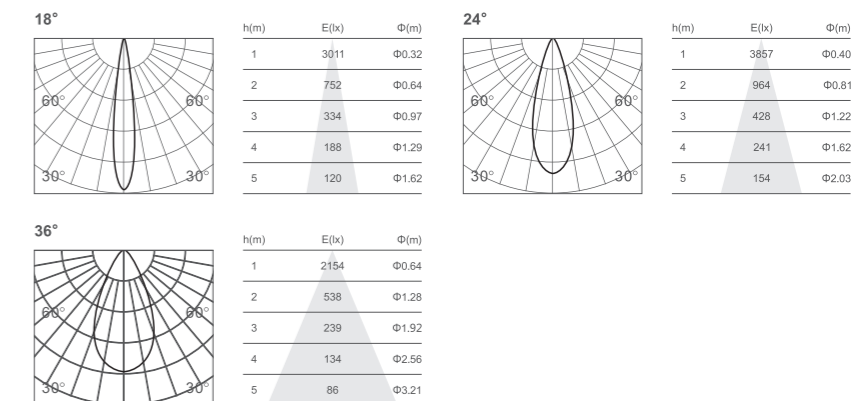



**NEW
SLIM
SERIES**

SLIM SERIES



CLICK SLIM I Track series



CLICK SLIM I Track series

MAGNETIC TRACK LPSLMT100/200 I Track series



Model	Power	Installation	Length
1 Meter profile-s	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile-s	200W max	Surface/Pendant/Recessed	2000mm

■ Sandy Black □ Sandy White

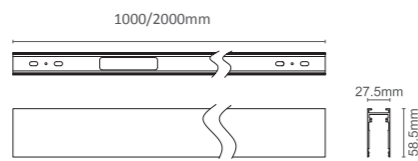

CORNER CONNECTIONS 90°

corner-s

■ Sandy Black □ Sandy White



Inner corner-s

■ Sandy Black □ Sandy White



Outer corner-s

■ Sandy Black □ Sandy White



T corner-s

■ Sandy Black □ Sandy White



45° corner-s

■ Sandy Black □ Sandy White



Cross corner-s

■ Sandy Black □ Sandy White




POWER FEED

Input terminal-

■ Sandy Black □ Sandy White




MAGNETIC RECESSED MERGE TRACK LPSLMT100/200 I Track series

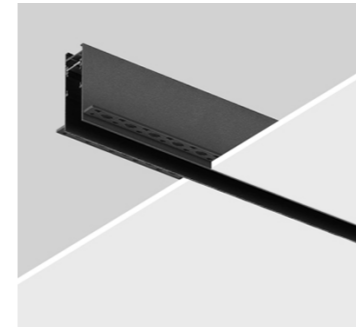

Model	Power	Installation	Length
1 Meter profile-s	200W max	Trimless recessed	1000mm
2 Meter profile-s	200W max	Trimless recessed	2000mm

■ Sandy Black □ Sandy White

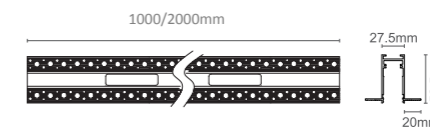

CORNER CONNECTIONS 90°


corner recessed-s

■ Sandy Black □ Sandy White




Inner corner recessed-s

■ Sandy Black □ Sandy White

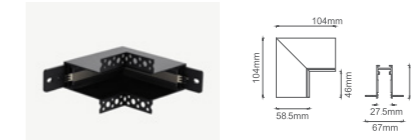

Outer corner recessed-s

■ Sandy Black □ Sandy White

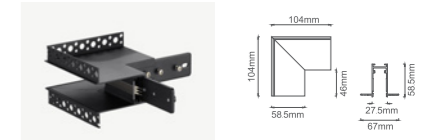



SPOT FLUSH LPFLSL10





Power	CRI	SDCM	CCT	Beam	Light output
6W	> 80	<3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

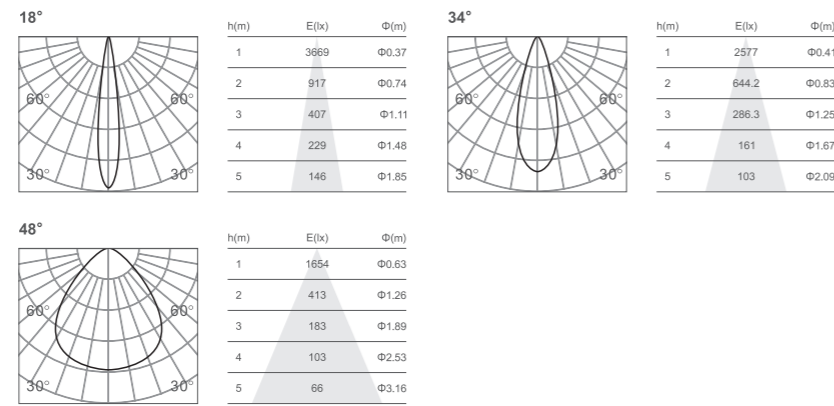

SPOT FLUSH LPFLSL30





Power	CRI	SDCM	CCT	Beam	Light output
24W	> 80	<3	2700K	18°	2400Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

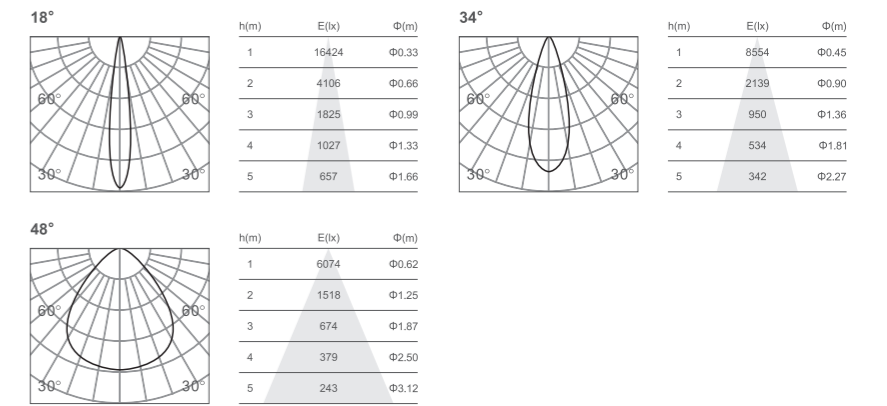

SPOT FLUSH LPFLSL19






Power	CRI	SDCM	CCT	Beam	Light output
12W	> 80	<3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

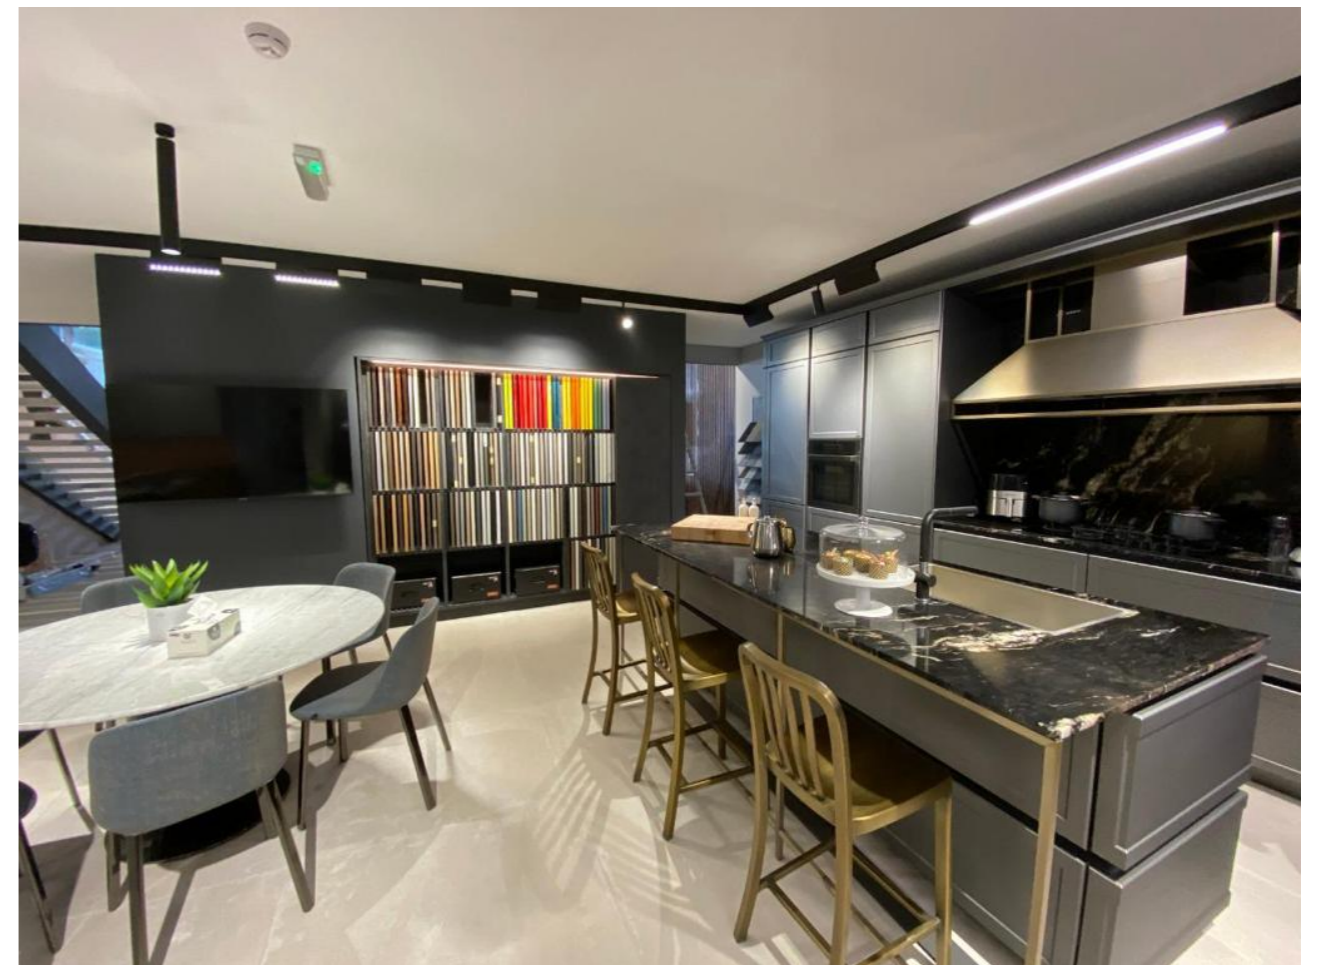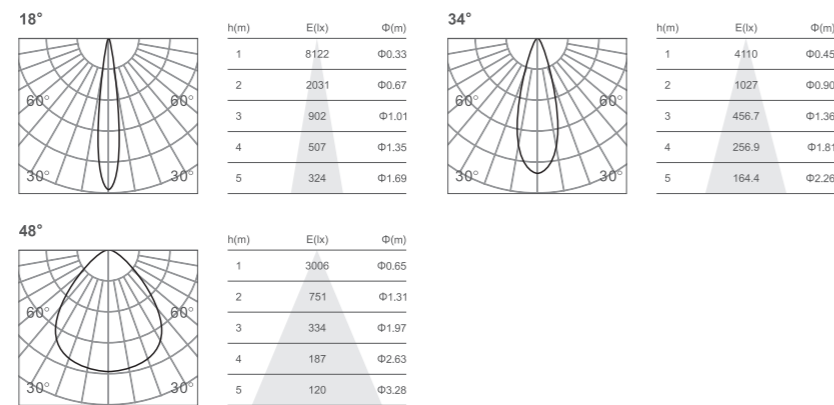



LINEAR FLUSH LPFLS19





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

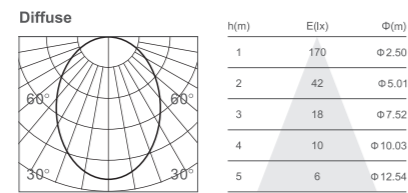

LINEAR FLUSH LPFL80





Power	CRI	SDCM	CCT	Beam	Light output
30W	> 80	<3	2700K	Diffuse	1800Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

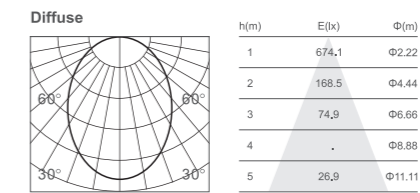

LINEAR FLUSH LPFL38





Power	CRI	SDCM	CCT	Beam	Light output
15W	> 80	<3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

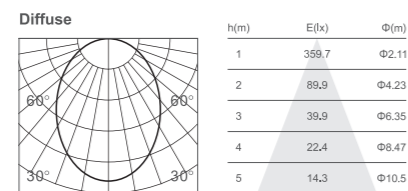



FOCUS SPOT LPFS10





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

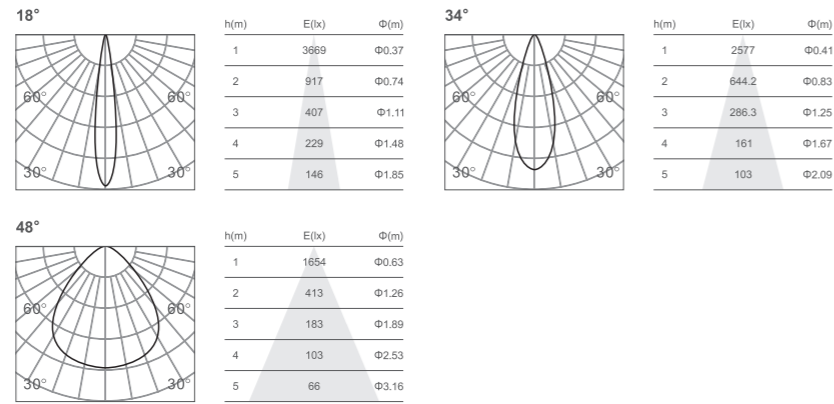

FOCUS DIFFUSED LPFD10





Power	CRI	SDCM	CCT	Beam	Light output
8W	> 80	<3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

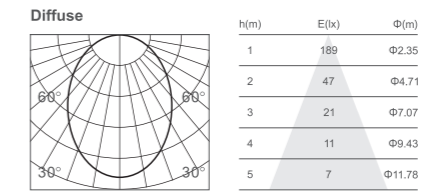

FOCUS SPOT LPFS19





Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

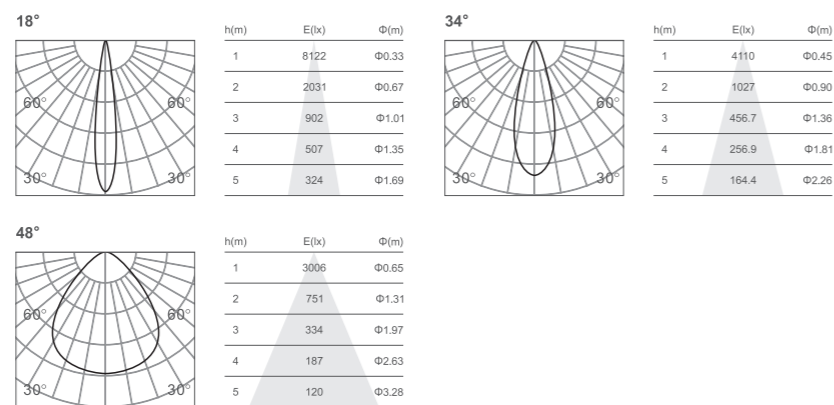

FOCUS DIFFUSED LPFD19






Power	CRI	SDCM	CCT	Beam	Light output
16W	> 80	<3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

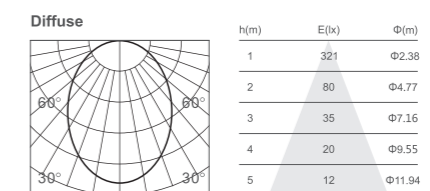

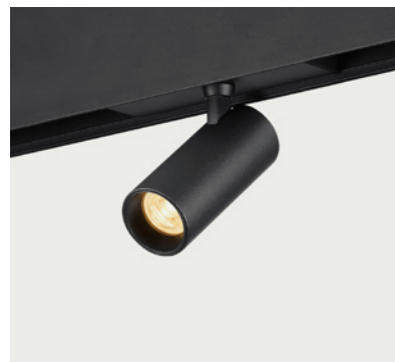

SPOT TRACK LPTL35S






Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

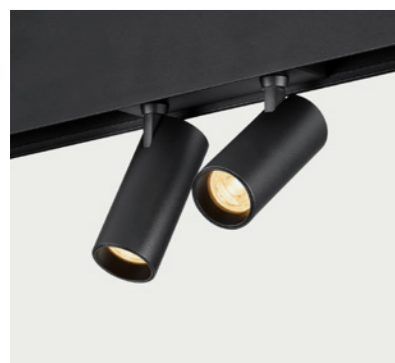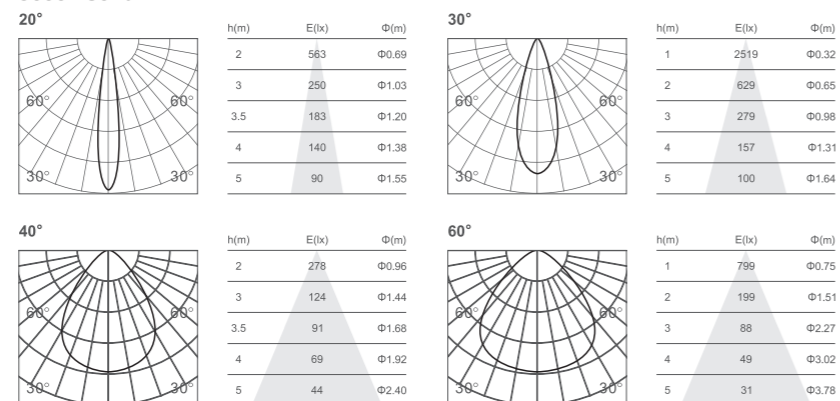

TWIN SPOT TRACK LPTL35D





Power	CRI	SDCM	CCT	Beam	Light output
2x5W	> 80	<3	2700K	20°	880Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

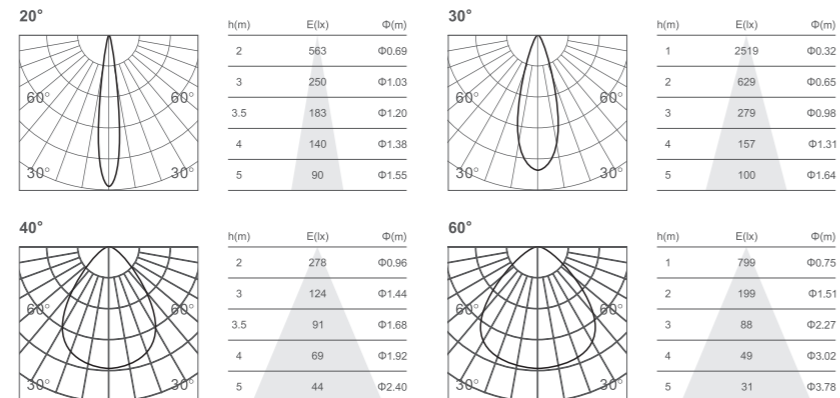

SMALL
GREAT IN EFFICACY



SPOT LPTL50





Power	CRI	SDCM	CCT	Beam	Light output
10W	> 80	<3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	


■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION


3000K 80Ra



h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62



h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03



h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21



CLICK TUBE | Pendant series



TUBE LPT35





Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
			60°		

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

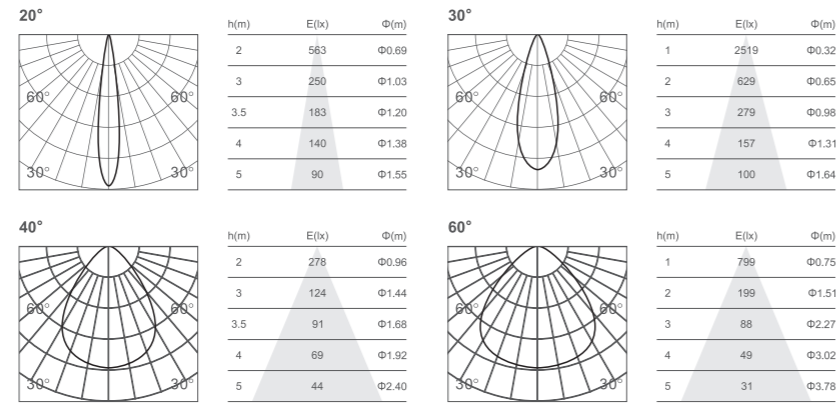

TUBE LPT50





Power	CRI	SDCM	CCT	Beam	Light output
10W	> 80	<3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

■ Sandy Black □ Sandy White ■ Brushed Gold

LIGHT DISTRIBUTION

3000K 80Ra

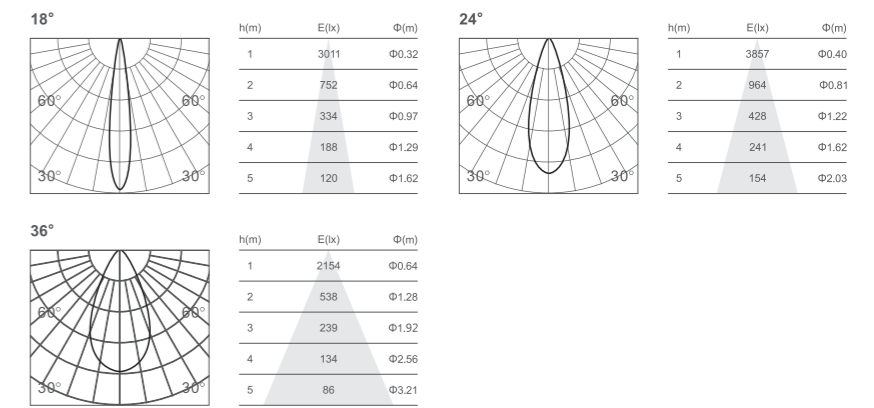

CLICK BALL | Globe series



GLOBE HANG LPH15





Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	Diffuse	290Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

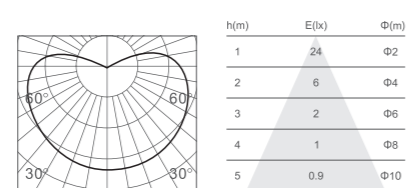

GLOBE SURFACE LPS15





Power	CRI	SDCM	CCT	Beam	Light output
5W	> 80	<3	2700K	Diffuse	290Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

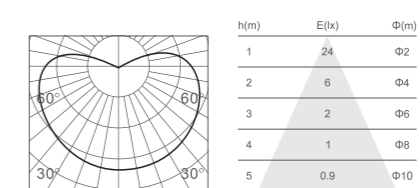

Middle East Office
P O Box 30828, DUBAI
T +971 50 922 9158
E info@savingenergytech.com

corporate Office 16192
Coastal HWY. Lewes , DE 19958 USA
T +1-800-345-CORP
E info@lume-plus.com