
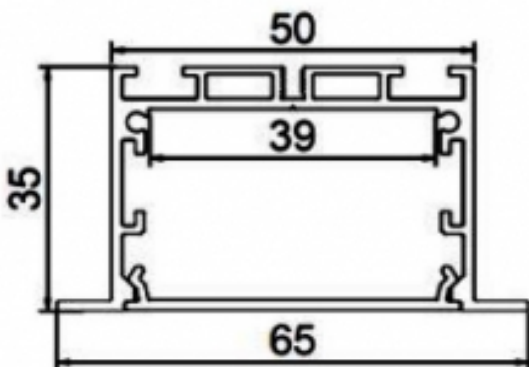


**LP ONE IP40 LED Linear R**

**LP0452000**

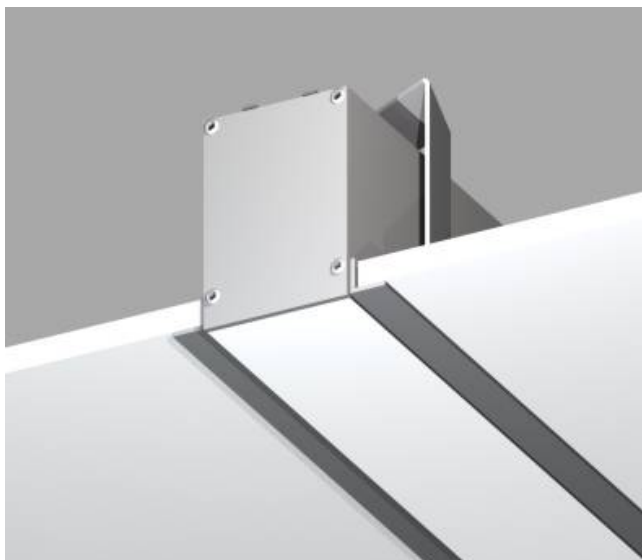

Technical data

**Recessed Slim LED panel Wall/Ceiling  
SMD 3014 -36W Per Meter**

The Slot Recessed Linear LED slim panel 65mm linear channel. This small channel allows for minimal linear lighting in recessed applications for wall & ceiling inclusive of remote driver constant voltage 24Vdc . Design with the minimalist LP ONE for sleek, micro-illumination in a multitude of applications. Custom or stocked lengths available.

Finishes:Natural Anodised (stocked) custom, black and white

Lamp Options:High Performance SMD microchip 3014 Citizen LED 36W per meter 3000K, 4000k ,6000K

Dimensions:lengths available 2 meters , Width 65mm with Height 32mm,Cut Out 50mm

Drivers are remote - Dimable drivers also available

Lens: Opal acrylic flush.

Material :Extruded aluminium 6035


Driver input voltage 24VDC

LED power 36 watts per meter

Light source :SMD Strip Light Luminous flux 2900lm per meter Working temperature -30~45°C

CE, IP40, Protection Class II

Make: Lumeplus LP0452000

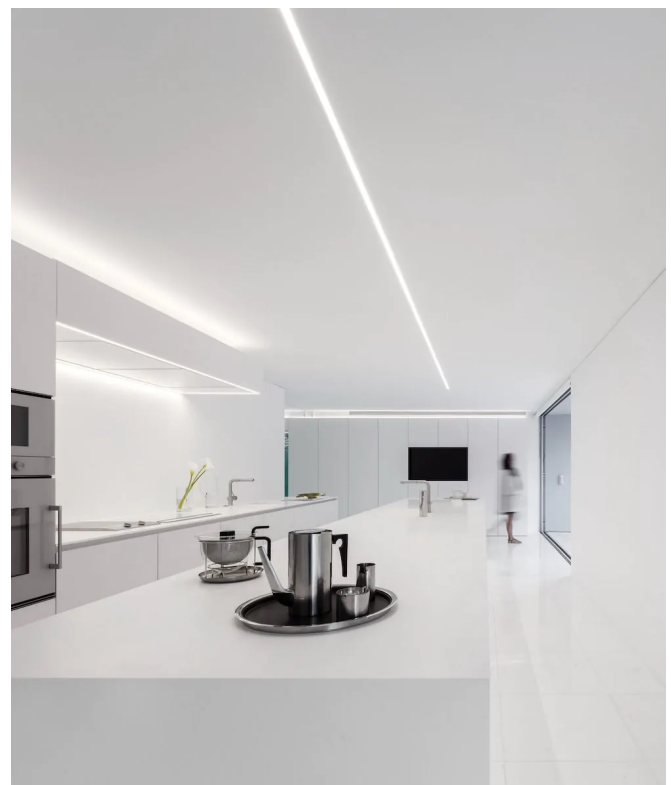

Modifications are possible due to the constant development and improvement of LED technology ( Lumeplus Subject to technical modification 3.2017 )