

DOUBLE ROW SMD STRIP HIGH LUMENS ULTRA BRIGHT
USED FOR WIDE COVES & BULKHEAD


- High lumen series, up to 6500lm/m
- 3 step MacAdam with Samsung LED
- 3M 9448A tape
- Waterproof Protection IP44, IP65, IP67, IP68
- UL listed
- 5 years warranty

POWERED BY **SAMSUNG**


24V



0.5 ft. (150mm) 18/2 AWG UL 2464 Wire 0.5 ft. (150mm) 18/2 AWG UL 2464 Wire




Field Cuttable: ~ 17.85 MM. (24V), ~ 0.7 INCH. (24V) **Max Run**¹: 5M. (24V), 16.4 FT. (24V)

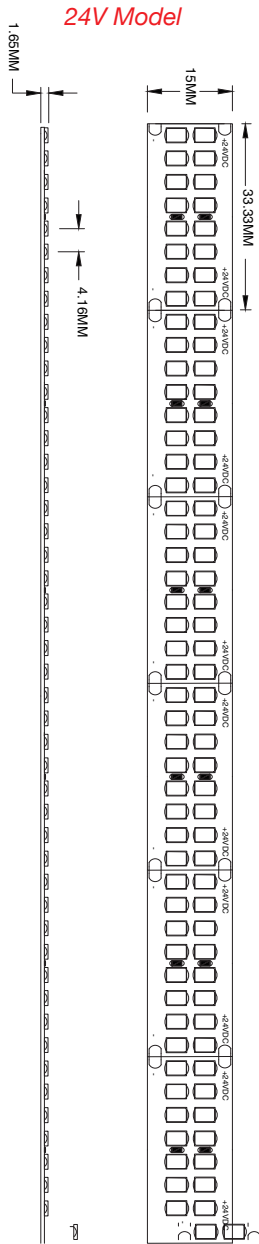

24V Model

LP229A

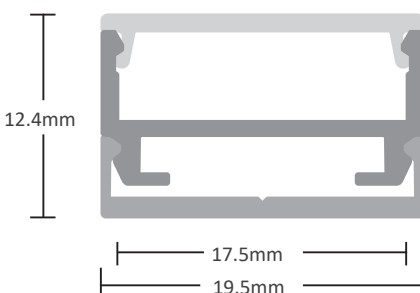

Item #	CCT (Kelvin) ⁵	Lumens / M ⁶	CRI	Efficacy (lm/W)
LP-2835-24V-480-15--20-WW	3000K	5499	81.8	122.21
LP-2835-24V-480-15--20-W	4000K	5905	83.9	131.23
LP-2835-24V-480-15--20-CW	6000K	6543	83.2	145.4

Input Voltage	24VDC Constant Voltage
Power Consumption	45W PerMt
LED Chip Type	Samsung 2835 SMD chip
LED Chip Beam Angle	120°
LED Chips	480 SMD per Mt
Mounting	3M 2122 9448A Adhesive
Field Cuttable	~ 17.85 MM. (24V), ~ 0.7 INCH. (24V)
Maximum Run	5M. (24V), 16.4 FT. (24V)
Dimmable	Yes
Ambient Temp	-4 ~ 122°F (-20 ~ 50°C)
Operating Temp	-4 ~ 176°F (-20 ~ 80°C)
Environment	Indoor / dry location
Dimensions	15MM x 1.65 MM. (W x H) 0.59 INCH x 0.06 INCH. (W x H)

