

# SPECIFICATION

## Ip65 Tri-Proof LED Light



### Caution

- Please read the user manual before installation.
- Please install, connect and test the lamp according to local regulations, Lamps should always be installed or replaced with care by professional person.
- Ensure the power is switched off before installation.
- Please check whether the lamps are broken or not during shipping, broken items cannot be used anymore.
- Please keep the lamps and accessories away from kids to avoid hurt by mistakes.
- For protecting eyes, please do not watch the luminous surface for a long time,
- Do not cover anything on lamp and keep lamps away from fire or high temperature objects.
- Incorrect installation and using, keep the right to refuse after-sales service for those disassembled or repaired items.
- Switch the power off and cool down the lamp before cleaning.
- The lamp is only suitable for weak acid and weak base environment.

### Temperature Characteristics T-ambient 40°C

#### Temperature

Operating: -20 ~ +50°C  
Storage: -40 ~ +85°C


### Features

- Water-proof, Dust-proof, Damp-proof, Pressure-proof.
- High luminous efficiency 130LM/W.
- Maximum 3M Long for single product .
- Excellent heat dissipation support stable quality.
- Convention installation for linking in series.
- Low light decay, L70=50,000 Hours.
- High impact test, IK10.
- Long lifespan 50,000 hours.
- Energy saving up to 80%.
- 5 years warranty.


### Application

- |                               |                   |
|-------------------------------|-------------------|
| ➤ Parking place               | ➤ Airport         |
| ➤ Tunnel / Corridor / Gallery | ➤ Exhibition Hall |
| ➤ Railway / Bus / MTR Station | ➤ Supermarket     |
| ➤ Warehouse / Factory         | ➤ Gas station     |

### Dimension

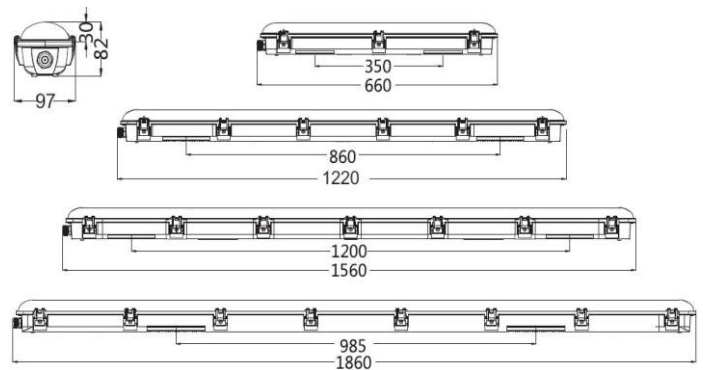


### Standard with Tridonic Driver




# INSTALLATION


1. Seat the fixing clips to the mounting surface according to the dimension instruction.

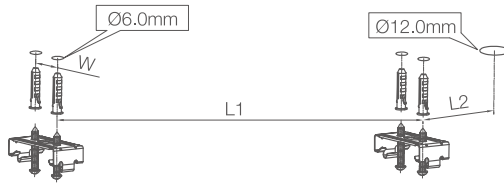

2. Push the Lamp body into the mounting clips.

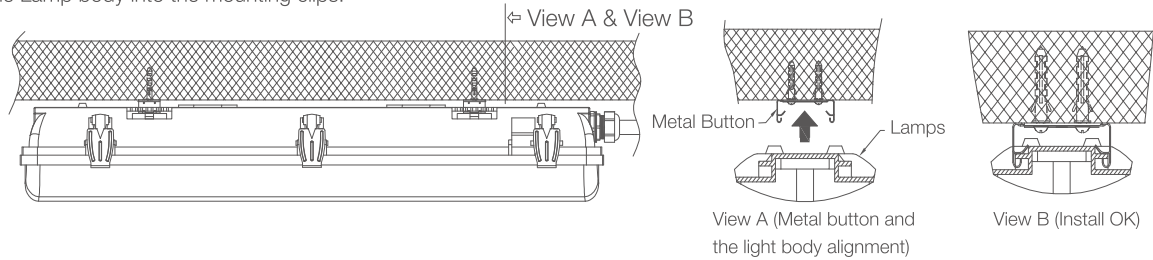

3. Turn off the power and connect the input wire.

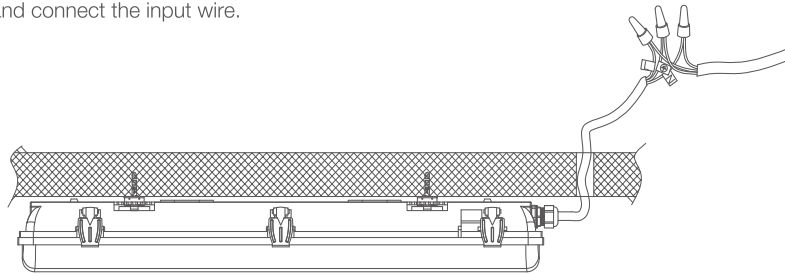

Item code	Size	Power	voltage	Lumen	Beam Angel	CRI	P.F.
LP-TP-20W	650*97*82	20W	AC220-240V	2600lm	120	85Ra	>0.95
LP-TP-40W	1220*97*82	40W	AC220-240V	5200lm	120	85Ra	>0.95
LP-TP-60W	1560*97*82	60W	AC220-240V	7800lm	120	85Ra	>0.95

## • Options

- > LED Driver: Philips Xitanium series / Lifud AC90-277V series
- > Dimming: STD ON-OFF / Traic dimmable / 1-10V dimmable
- > Emergency: 3 hours intergrated emergency

